

WAAS CH <b>61141</b> <b>W36A</b>	APP CRS <b>003°</b>	Rwy Ldg TDZE Apt Elev	<b>5001</b> <b>286</b> <b>286</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 36


ATMORE MUNI (ØR1)

RNP APCH - GPS.


Baro-VNAV NA. Rwy 36 helicopter visibility reduction below ¼ SM NA. Use 12J altimeter setting; when not received, use GZH altimeter setting and increase LPV DA to 647 feet. Increase LNAV/VNAV DA to 619 feet. Increase all MDAs 20 feet.

MISSED APPROACH: Climb to 2600 direct FEVIB and hold.


12J AWOS-3PT <b>119.325</b>	PENSACOLA APP CON <b>127.35 291.625</b>	UNICOM <b>122.8 (CTAF) Ø</b>
--------------------------------	--	---------------------------------

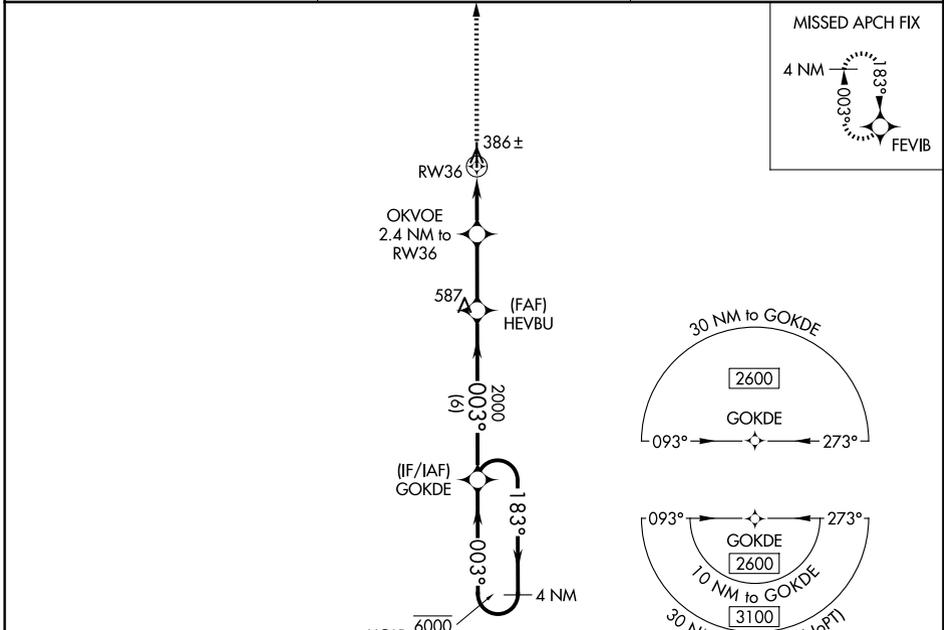

ELEV 286	TDZE 286
----------	----------

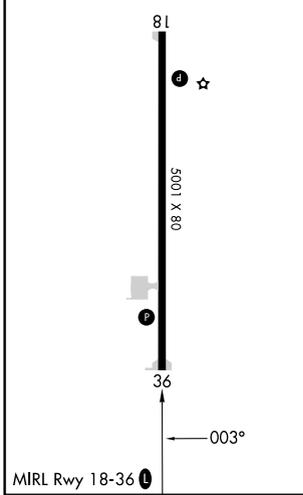

2600 FEVIB VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40). 4 NM Holding Pattern

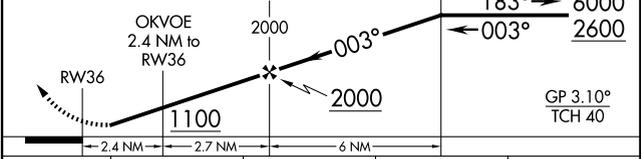

CATEGORY	A	B	C	D
LPV DA		641-1	355 (400-1)	
LNAV/VNAV DA		613-1	327 (400-1)	
LNAV MDA	740-1	454 (500-1)	740-1 3/8	454 (500-1 3/8)
CIRCLING	940-1	654 (700-1)	1000-2 714 (800-2)	1000-2 1/4 714 (800-2 1/4)

SE-4, 19 MAR 2026 to 16 APR 2026

SE-4, 19 MAR 2026 to 16 APR 2026