
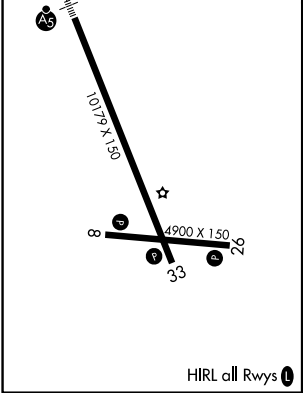


WAAS CH 45612 W15A	APP CRS 146°	Rwy Ldg TDZE Apt Elev	10179 75 100
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15
COLD BAY (CDB) (PACD)

RNP APCH. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Circling NA for Cat A southwest of Rwy 15-33 at night. Circling NA for Cats B/C/D southwest of Rwy 15-33. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cat C/D visibility to RVR 6000. #RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR ⚠	MISSED APPROACH: Climb to 4100 direct PABGE and on track 134° to AFVEK and hold, continue climb-in-hold to 4100.
--	------------	--

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 0
-----------------------	--	---

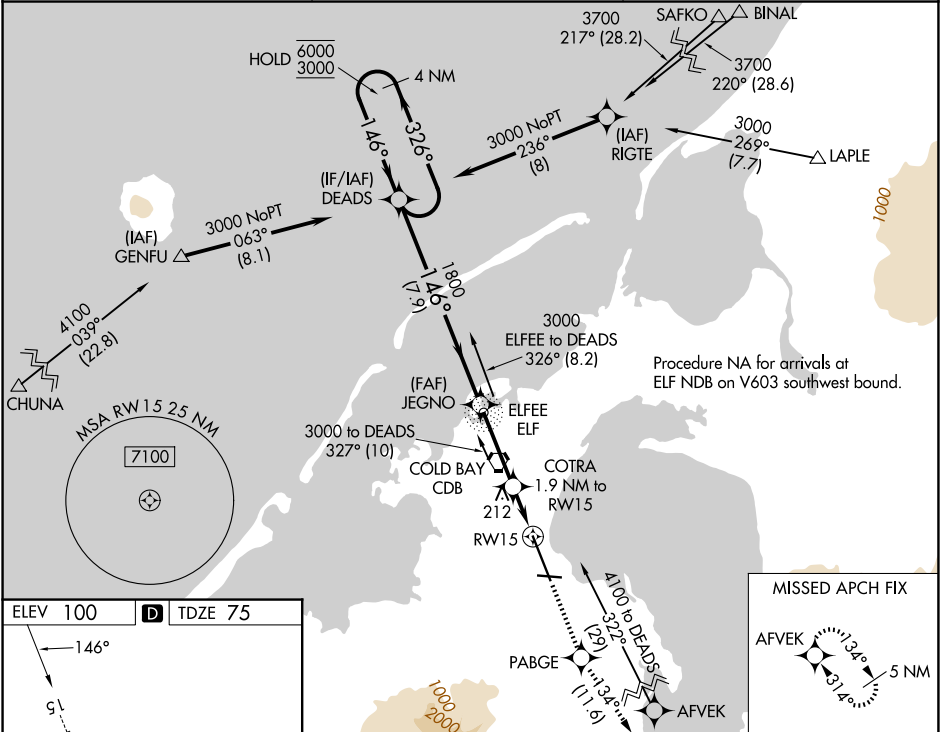

4 NM Holding Pattern	DEADS	JEGNO	4100	PABGE	tr 134°	AFVEK
6000 3000	326° 146°	1800	COTRA 1.9 NM to RW15	*1.1 NM to RW15	*LNAV only	RW15
GP 3.10° TCH 55	1800	*760	7.9 NM	3.2 NM	0.8 NM	1.1 NM
CATEGORY	A	B	C	D		
LPV DA#	275/24	200 (200-½)				
LNAV/VNAV DA	325/24	250 (300-½)				
LNAV MDA	480/24	405 (400-½)	480/40	405 (400-¾)		
CIRCLING	540-1 440 (500-1)	560-1 460 (500-1)	560-1½ 460 (500-1½)	860-2½ 760 (800-2½)		