



KILNS FIVE DEPARTURE (RNAV)

SE-2, 16 APR 2026 to 14 MAY 2026


CHARLOTTE DEP CON
128.325 307.8
AWOS-3
118.175
CLNC DEL
127.35
UNICOM (CTAF)
122.725

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

- NOTE: For turboprops only.
- NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.



TOP ALTITUDE:
3000

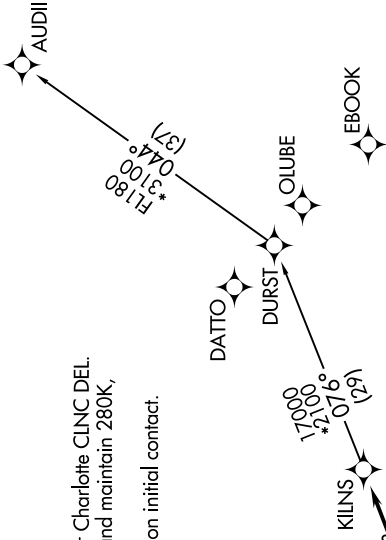

TAKEOFF MINIMUMS
Rwy 2: Standard.
Rwy 20: 400-2³/₄ or standard with minimum climb of 205' per NM to 1300, or alternatively, with standard takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later than 1'200' prior to DER.

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RUNWAY 2:** Climb on heading assigned by ATC. Thence
- TAKEOFF RUNWAY 20:** Climb heading 202° to 1700 before turning right, then on heading assigned by ATC, thence
- on RADAR vectors to MUNBE, then on depicted route to KILNS, then on AUDII Transition. Maintain 3000. Expect clearance to filed altitude within 10 minutes after departure.

AUDII TRANSITION (KILNS5.AUDII)

NOTE: Chart not to scale.

KILNS FIVE DEPARTURE (RNAV)

SE-2, 16 APR 2026 to 14 MAY 2026