

| | | |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS CH 53528 W18A | APP CRS 180° | Rwy Idg 5199 TDZE 430 Apt Elev 430 |
|----------------------------------------|------------------------|---------------------------------------------------------------|




RNAV (GPS) RWY 18

LAWRENCEVILLE-VINCENNES INTL (LWV)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F).
⚠ DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Carmel altimeter setting. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA 656 feet; increase LNAV/VNAV DA to 902 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM; and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2600 direct VOCUT and hold.

| | | |
|----------------------|--------------------------------------------|---------------------------------|
| ASOS 118.0 | EVANSVILLE APP CON ★ 125.6 343.7 | UNICOM 122.8 (CTAF) ① |
|----------------------|--------------------------------------------|---------------------------------|

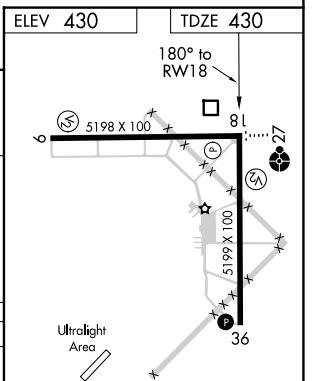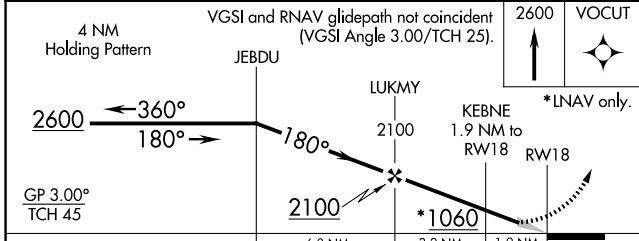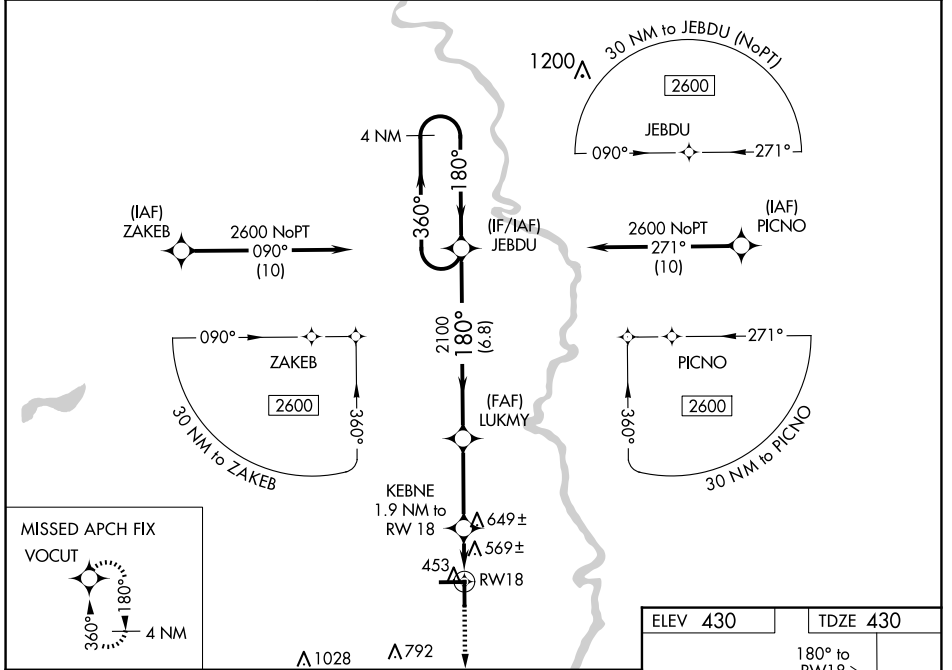

| CATEGORY | A | B | C | D |
|--------------|-------|-------------|--------------|-------------------------|
| LPV DA | | 630-¾ | 200 (200-¾) | |
| LNAV/VNAV DA | | 876-1½ | 446 (500-1½) | |
| LNAV MDA | 940-1 | 510 (600-1) | 940-1¾ | 510 (600-1¾) |
| CIRCLING | 940-1 | 510 (600-1) | 940-1½ | 1160-2¼ 730 (800-2¼) |

REIL Rwy 9, 27, 18 and 36 ①
 MRL Rwy 9-27 and 18-36 ②

EC-3, 11 JUN 2026 to 09 JUL 2026

EC-3, 11 JUN 2026 to 09 JUL 2026