

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>45905</b><br><b>W22A</b> | APP CRS<br><b>215°</b> | Rwy Ldg <b>7193</b><br>TDZE <b>26</b><br>Apt Elev <b>26</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

# RNAV (GPS) RWY 22


PUNTA GORDA (PGD)

RNP APCH.



**⚠** Baro-VNAV NA when using Page Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 276, LNAV/VNAV DA to 360, and all MDAs 60 feet; increase LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct BULOW and hold.

|                        |                                            |                                             |                          |                          |
|------------------------|--------------------------------------------|---------------------------------------------|--------------------------|--------------------------|
| ATIS<br><b>135,675</b> | FORT MYERS APP CON★<br><b>127.05 306.2</b> | PUNTA GORDA TOWER★<br><b>121.0 (CTAF) 0</b> | GND CON<br><b>119.55</b> | UNICOM<br><b>122,975</b> |
|------------------------|--------------------------------------------|---------------------------------------------|--------------------------|--------------------------|

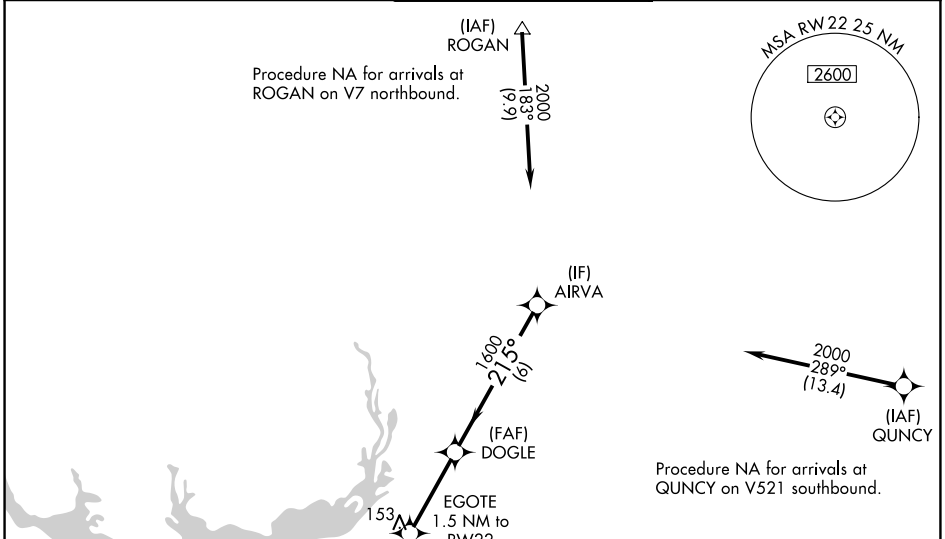

|         |          |         |
|---------|----------|---------|
| ELEV 26 | <b>D</b> | TDZE 26 |
|---------|----------|---------|

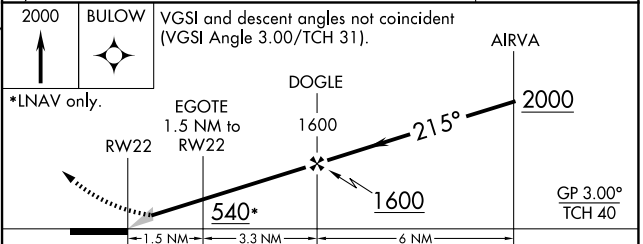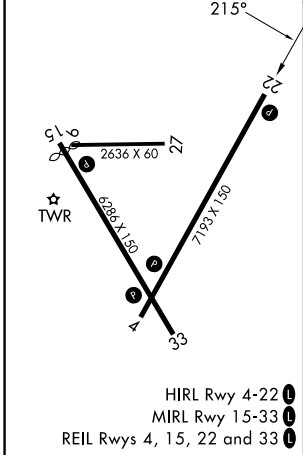

| CATEGORY     | A                    | B                    | C                            | D                            |
|--------------|----------------------|----------------------|------------------------------|------------------------------|
| LPV DA       |                      | 226-3/4              | 200 (200-3/4)                |                              |
| LNAV/VNAV DA |                      | 310-1                | 284 (300-1)                  |                              |
| LNAV MDA     | 420-1                | 394 (400-1)          | 420-1 1/8                    | 394 (400-1 1/8)              |
| CIRCLING     | 460-1<br>434 (500-1) | 580-1<br>554 (600-1) | 600-1 1/2<br>574 (600-1 1/2) | 740-2 1/4<br>714 (800-2 1/4) |

SE-3, 11 JUN 2026 to 09 JUL 2026

SE-3, 11 JUN 2026 to 09 JUL 2026