



|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>97633</b><br><b>W11A</b> | APP CRS<br><b>109°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>3321</b><br><b>1172</b><br><b>1174</b> |
|--|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 11

GEAUGA COUNTY (7G8)


|  |  |   |
|--|--|---|
| RNP APCH - GPS.  |  | MISSED APPROACH:<br>Climb to 4000 direct ZESAK and hold, continue climb-in-hold 4000. |
| <p><b>▽</b> Rwy 11 helicopter visibility reduction below 1 SM NA. Use Youngstown/Warren altimeter setting; when not received, use Cuyahoga County altimeter setting and increase all MDAs 40 feet and increase LNAV Cat C and Circling Cat C visibilities ¼ SM. Straight-in Rwy 11 NA at night. Circling Rwy 11 NA at night.</p> |  |   |

|                           |  |                               |
|---------------------------|--|-------------------------------|
| YNG ASOS<br><b>123.75</b> | CLEVELAND APP CON<br><b>125.35 346.325</b> | UNICOM<br><b>123.0 (CTAF)</b> |
|---------------------------|--|-------------------------------|

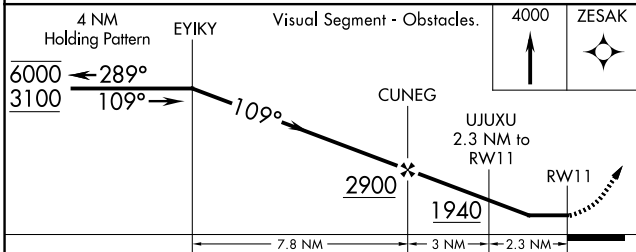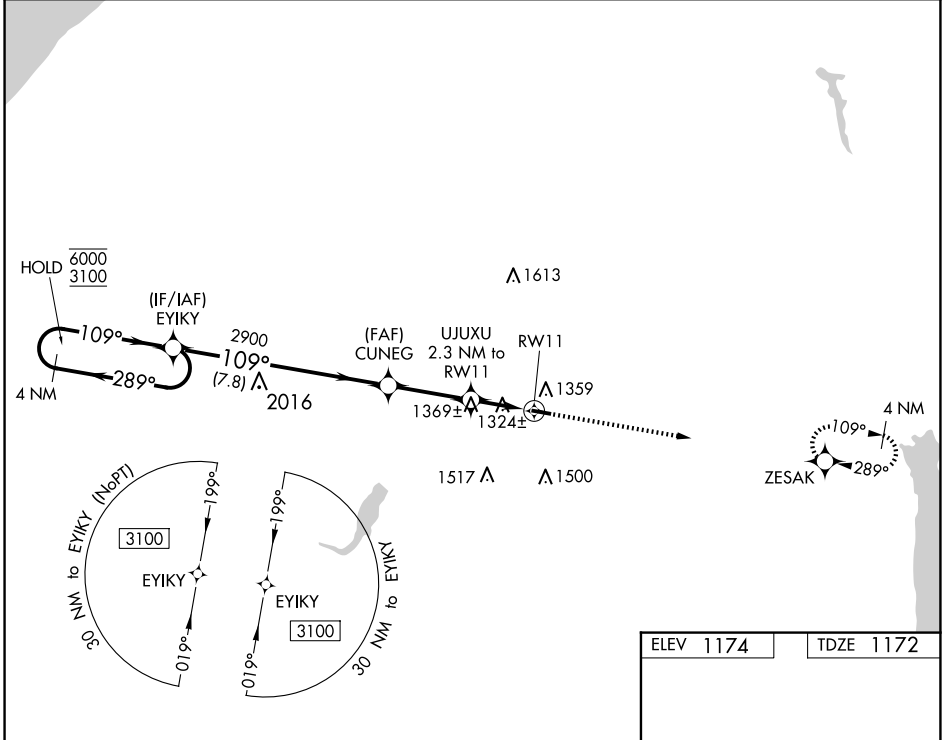

|           |           |
|-----------|-----------|
| ELEV 1174 | TDZE 1172 |
|-----------|-----------|

| CATEGORY          | A      | B           | C                       | D  |
|-------------------|--------|-------------|-------------------------|----|
| LP MDA            | 1640-1 | 468 (500-1) | 1640-1½<br>468 (500-1½) | NA |
| LNAV MDA          | 1680-1 | 508 (600-1) | 1680-1½<br>508 (600-1½) | NA |
| <b>C</b> CIRCLING | 1760-1 | 586 (600-1) | 1900-2<br>726 (800-2)   | NA |

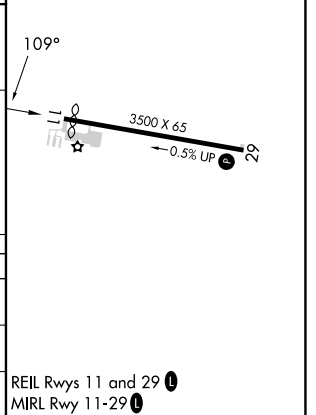

EC-2, 11 JUN 2026 to 09 JUL 2026

EC-2, 11 JUN 2026 to 09 JUL 2026