

|                                        |                        |                                                                      |
|----------------------------------------|------------------------|----------------------------------------------------------------------|
| WAAS<br>CH <b>87033</b><br><b>W17A</b> | APP CRS<br><b>173°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>3200</b><br><b>20</b><br><b>20</b> |
|----------------------------------------|------------------------|----------------------------------------------------------------------|



RNAV (GPS) RWY 17

KIPNUK (IIK) (PAKI)

**⚠** Baro-VNAV NA when using Toksook Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Procedure NA at night. VDP NA when using Toksook Bay altimeter setting. When local altimeter setting not received use Toksook Bay altimeter setting; increase LPV DA to 389 feet and visibility all Cats ¼ SM. Increase LNAV/VNAV DA to 553 feet and visibility all Cats ½ SM. Increase all MDA 120 feet. Increase LNAV Cat C and D visibility to 1¼ SM, Circling Cat C to 2 SM, Cat D to 2¼ SM.

**MISSED APPROACH:**  
Climb to 500 then climbing left turn to 2400 direct JOSQO and hold.

|                           |                                        |                        |
|---------------------------|----------------------------------------|------------------------|
| AWOS-3P<br><b>118.325</b> | ANCHORAGE CENTER<br><b>125.2 372.0</b> | CTAF<br><b>122.7 0</b> |
|---------------------------|----------------------------------------|------------------------|

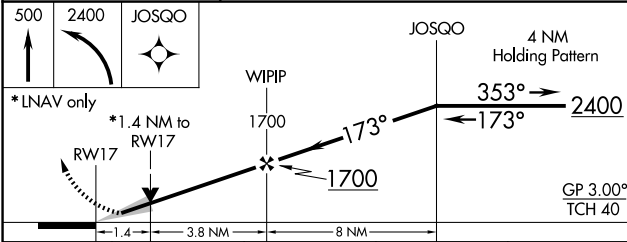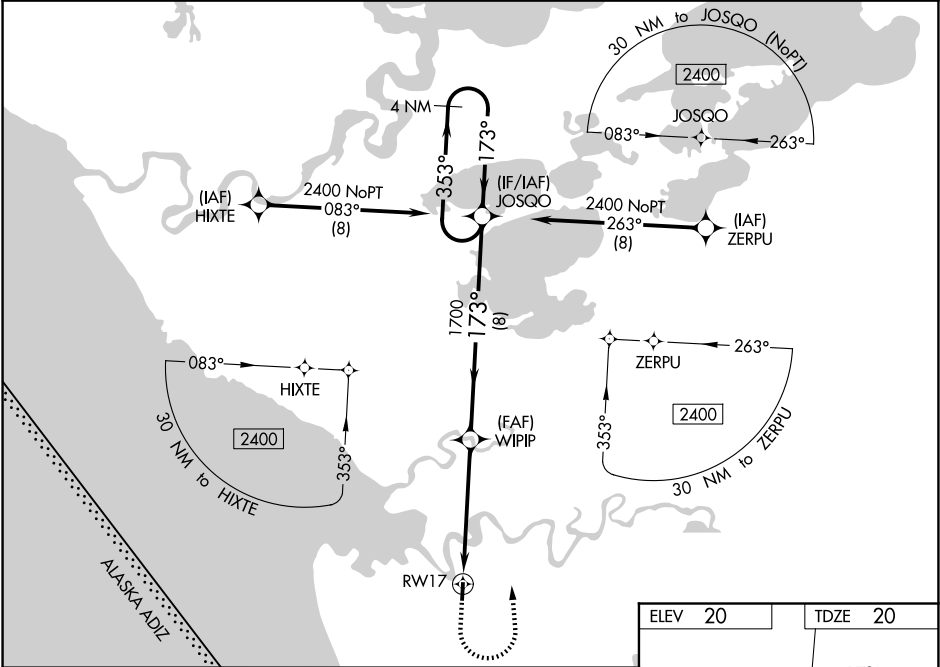

|                  |         |
|------------------|---------|
| ELEV 20          | TDZE 20 |
| 173°             |         |
| 41               |         |
| 3200 X 40        |         |
| 35               |         |
| MIRL Rwy 17-35 0 |         |

| CATEGORY     | A      | B            | C            | D            |
|--------------|--------|--------------|--------------|--------------|
| LPV DA       | 270-1  | 250 (300-1)  |              |              |
| LNAV/VNAV DA | 434-1⅜ | 414 (500-1⅜) |              |              |
| LNAV MDA     | 520-1  | 500 (500-1)  | 520-1⅜       | 500 (500-1⅜) |
| CIRCLING     | 580-1  | 560 (600-1)  | 580-1½       | 580-2        |
|              |        |              | 560 (600-1½) | 560 (600-2)  |

AK, 14 MAY 2026 to 09 JUL 2026

AK, 14 MAY 2026 to 09 JUL 2026