


WAAS CH 77638 W31A	APP CRS 313°	Rwy Ldg 2821 TDZE 836 Apt Elev 836
--	------------------------	---

RNAV (GPS) RWY 31


SMITH FLD (SMD)

▼ NA ❄️ -21°C Rwy 31 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Procedure NA at night. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet, LP Cat C visibility ¼ SM and LNAV Cat C visibility ½ SM.	MISSED APPROACH: Climb to 2700 direct GRUSS and on track 273° to WERBU and hold.
---	--

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

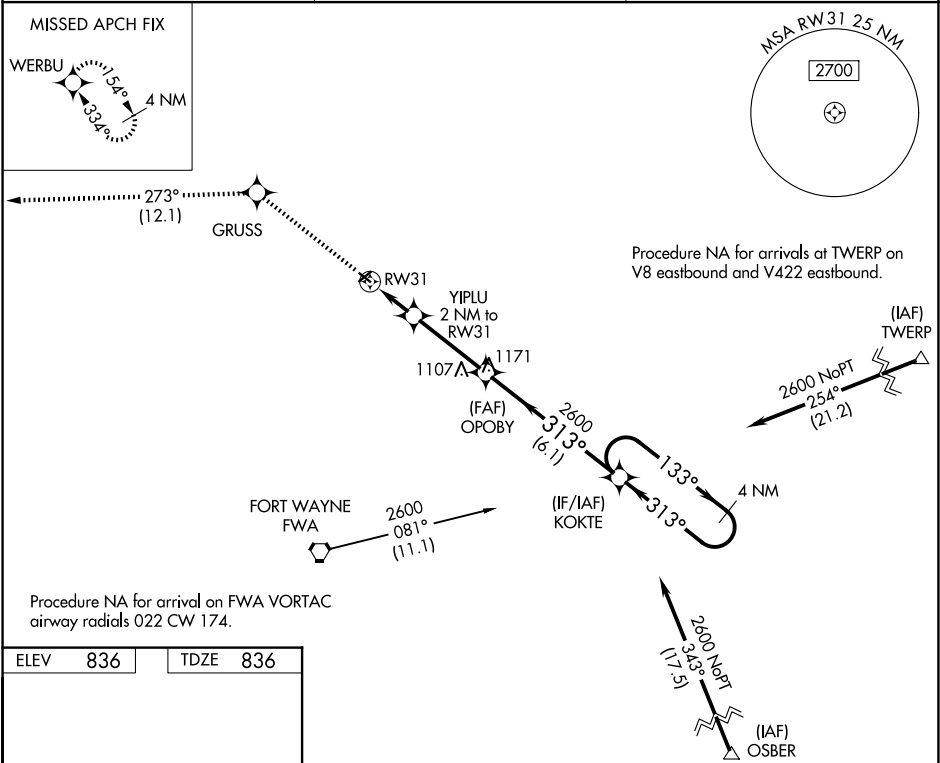

ELEV 836	TDZE 836
----------	----------

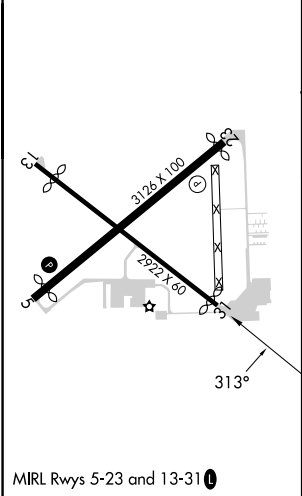

Visual Segment - Obstacles.				
2700	GRUSS	tr 273°	WERBU	4 NM Holding Pattern
YIPLU 2 NM to RW31				
RW31				
1500				
2 NM 3.3 NM 6.1 NM				
CATEGORY	A	B	C	D
LP MDA	1240-1	404 (500-1)	1240-1 1/8 404 (500-1 1/8)	NA
LNAV MDA	1260-1	424 (500-1)	1260-1 1/4 424 (500-1 1/4)	NA
CIRCLING	1400-1	564 (600-1)	1940-3 1104 (1200-3)	NA

EC-2, 09 JUL 2026 to 06 AUG 2026

EC-2, 09 JUL 2026 to 06 AUG 2026