


TACAN RWY 29

TACAN Chan 77	DOB 291°	APCH CRS 291°	Rwy Idg 10,002 TDZE 1014 Arprt Elev 1069	[USAF]	DOBBINS ARB (KMGE)
▼ * When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 2 miles. ** Circling not authorized N of Rwy 11-29 for CAT DE aircraft. Circling to assault strip not authorized.				SALSF (A2)	† MISSED APPROACH: Climb to 3000 on DOB TACAN R-286 to CYLON and hold.

ATIS ★ 269.5	ATLANTA APP CON 121.0 268.7	TOWER ★ 120.75 370.875	GND CON 125.3 275.8	ASR
-----------------	--------------------------------	---------------------------	------------------------	-----

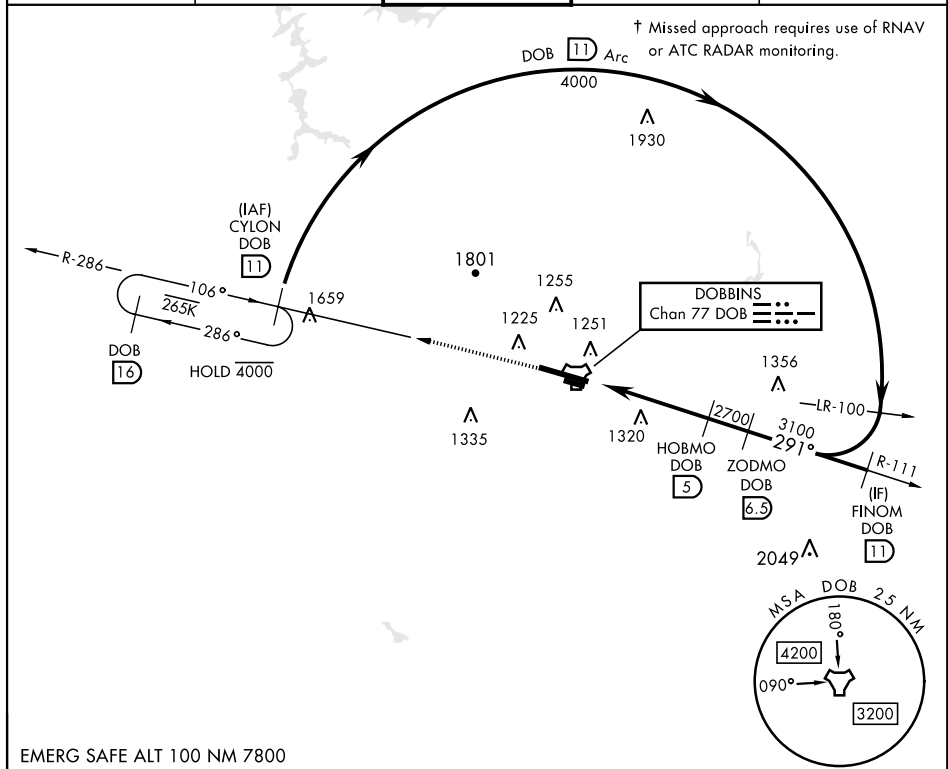

EMERG SAFE ALT 100 NM 7800

CATEGORY	A	B	C	D	E
S-29*	1720/40	706 (700-¾)	1720-1¾	706	(700-1¾)
C CIRCLING**	1720-1	651 (700-1)	1760-2 691 (700-2)	1760-2¼ 691 (700-2¼)	1760-2½ 691 (700-2½)

Additional information from the diagram:

- VGSI and descent angles not coincident. (VGSI Angle 3.00)
- TWR (Tower) at 1273 ft.
- ASSAULT STRIP at 1273 ft.
- Distances: 10,002 x 300, 3,495 x 60, 290.
- Angles: 110°, 0.8% UP, 0.8% UP, 291°.
- Waypoints: A1, P, H, H, A, A2.