


WAAS CH 58027 W19A	APP CRS 187°	Rwy Ldg TDZE 2687 Apt Elev 2694
--	------------------------	---

RNAV (GPS) RWY 19
TWIN COUNTY (HLX)

RNP APCH - GPS. ▼ Rwy 19 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use PSK altimeter setting and increase all MDAs 140 feet, increase LP and LNAV ▲ visibilities Cats C and D ¾ SM, and Circling Cat C ¼ SM. VDP NA with PSK altimeter setting.	MISSED APPROACH: Climb to 3200 then climbing left turn to 5000 direct EVMEH and hold.
---	---

AWOS-3 118.375	ROANOKE APP CON 126.0 339.8	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

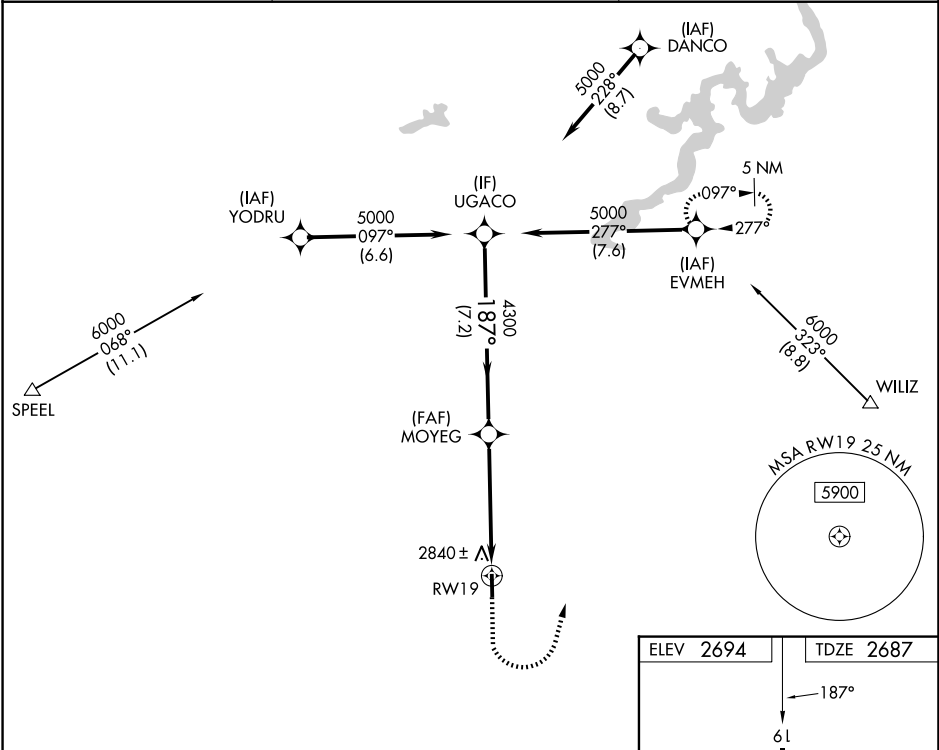

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 36).				
UGACO		MOYEG		3200 5000 EVMEH
5000		4300		1.4 NM to RWY 19
187°		3.00°		3.7 NM
7.2 NM		3.7 NM		1.4
CATEGORY	A	B	C	D
LP MDA	3120-1	433 (500-1)	3120-1¼	433 (500-1¼)
LNAV MDA	3140-1	453 (500-1)	3140-1¾	453 (500-1¾)
CIRCLING	3200-1	506 (600-1)	3200-1½	3680-3

