

APP CRS	Rwy Ldg	9000
095°	TDZE	1000
	Apt Elev	1026

RNAV (RNP) Z RWY 10

HARTSFIELD/JACKSON ATLANTA INTL (ATL)


▼

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized; arrival from ROBNS NA. For inop ALS, increase RNP 0.11 DA all Cats visibility to RVR 4500.

ALS-F-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct SCARR and hold.

D-ATIS	ATLANTA APP CON	ATLANTA TOWER						ALL RWYS	GND CON				ALL RWYS
119.65	134.725 379.9	8L-26R	8R-26L	9L-27R	9R-27L	10-28	254.4		121.9	121.75	121.65	254.4	

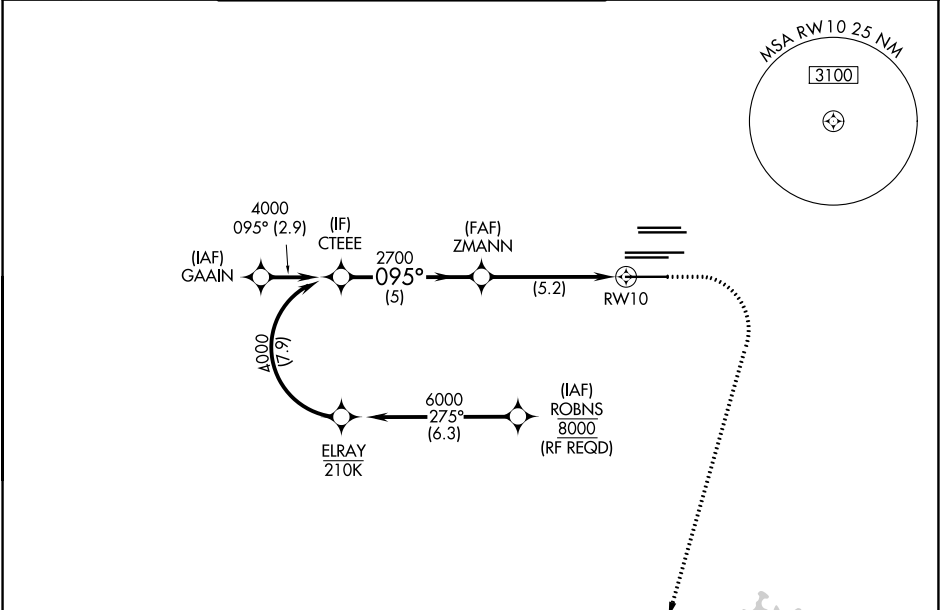

MISSED APCH FIX

CTEEE

ZMANN

RW10

4000

2700

2700

GP 3.00°

TCH 55

5 NM

5.2 NM

1500

3000

SCARR

CATEGORY	A	B	C	D
RNP 0.11 DA		1290/24	290 (300-½)	
RNP 0.30 DA		1456/50	456 (500-1)	

AUTHORIZATION REQUIRED

ELEV 1026

TDZE 1000

HIRL all Rwys

TDZL/RCLS Rwys 8L,

9R, 10, 26R, 27L and 28

SE-4, 06 AUG 2026 to 03 SEP 2026

SE-4, 06 AUG 2026 to 03 SEP 2026