

RNAV (GPS) PRM Y RWY 4L
(CLOSE PARALLEL)

DETROIT METRO WAYNE COUNTY (DTW)

WAAS CH 82439 W04A	APP CRS 038°	Rwy Ldg TDZE 645 Apt Elev 645
--	------------------------	---

RNP APCH.


▼ Rwy 4L and 4R separated by 3000 feet centerline to centerline. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. Dual VHF comm required. See additional requirements on AAUP.

ALSF-2




MISSED APPROACH:
Climb to 1100 then
climbing left turn to 4000
direct DOHNT and hold.

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 135.0 317.725 PRM 127.05	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)
--------------------------	--	--	---

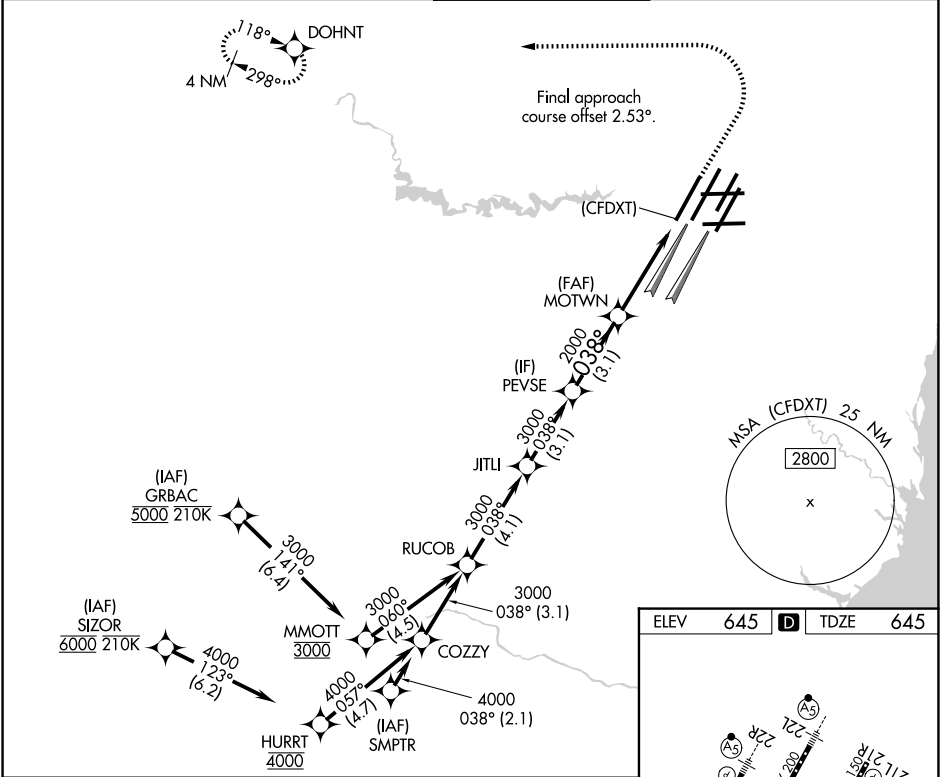

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).				1100	4000	DOHNT
RUCOB				JITLI	PEVSE	MOTWN
3000				3000	3000	2000
GP 3.00° TCH 55				2000		
4.1 NM				3.1 NM	3.1 NM	4.1 NM
A				B	C	D
LPV DA				895/24	250 (300-½)	
LNAV/VNAV DA				1068/45	423 (500-¾)	

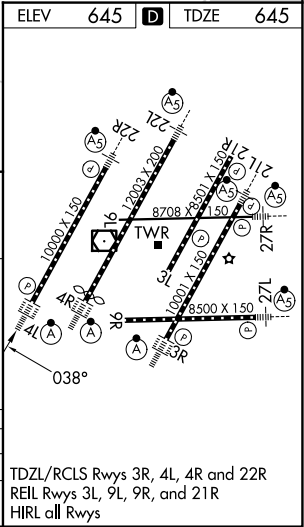

RNAV (GPS) PRM Y RWY 4L (CLOSE PARALLEL)