


LOC/DME I-FLO 109.1 Chan 28	APP CRS 093°	Rwy Ldg 6502 TDZE 147 Apt Elev 147	ILS or LOC RWY 9 FLORENCE RGNL (FLO)	
---	------------------------	---	---	--

RNP APCH - GPS. DME required.	MALSRR	MISSED APPROACH: Climb to 2000 direct ESVAC and hold.
Circling Rwy 1, 19 NA at night. For inop ALS, increase S-LOC 9 Cats C and D visibilities to 2 SM.		

ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 0 353.85	GND CON 121.9 353.85	UNICOM 122.95
------------------------	---	--	--------------------------------	-------------------------

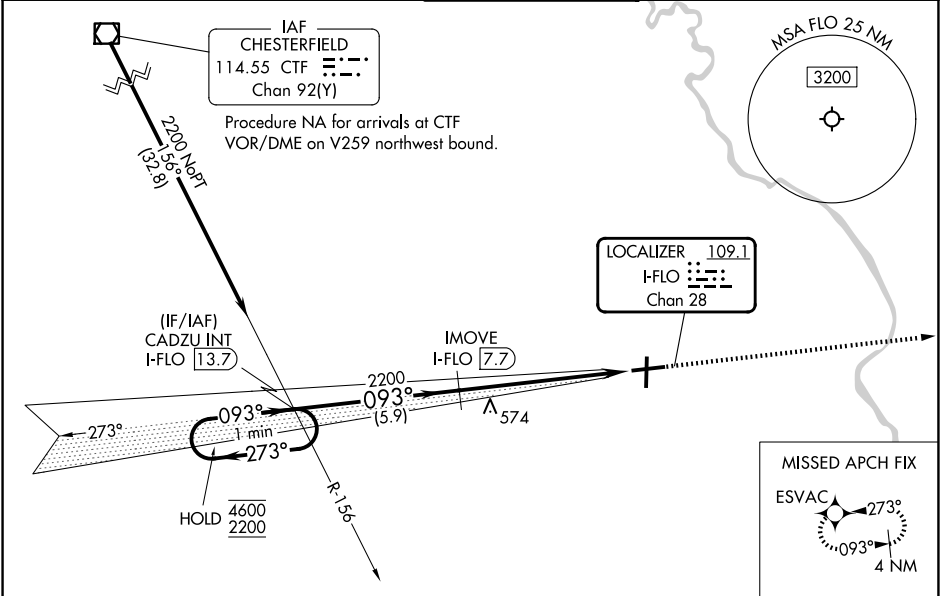

					ELEV 147	TDZE 147
One Minute Holding Pattern 4600 2200 GS 3.00° TCH 59 CADZU INT I-FLO 13.7 IMOVE I-FLO 7.7 2000 ESVAC 2200 2200 273° 093° 093° 2200 I-FLO 3.5 I-FLO 1.5 5.9 NM 4.2 NM 2.1 NM					TWR 61 61 0.4% UP 6502 X 150 0.5% UP 6000 X 150 093° 6 6	
CATEGORY	A	B	C	D	REIL Rwy 1, 19 and 27	
S-ILS 9	347-½ 200 (200-½)				HIRL Rwy 9-27	
S-LOC 9	860-½ 713 (800-½)		860-1⅝ 713 (800-1⅝)		MIRL Rwy 1-19	
CIRCLING	860-1 713 (800-1)		900-2¼ 753 (800-2¼)	900-2½ 753 (800-2½)	FAF to MAP 6.3 NM	
					Knots	60 90 120 150 180
					Min:Sec	6:18 4:12 3:09 2:31 2:06