# RNAV (GPS) RWY 28

## GREENVILLE DOWNTOWN (GMU)

| WAAS | APP CRS | Rwy Ldg | 3463 |
|---|---|---|---|
| CH 87037 | 276° | TDZE | 1013 |
| W28A | | Apt Elev | 1048 |

Baro-VNAV NA when using Greer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅛ mile. Helicopter visibility reduction below 1 SM NA. Night landing: Rwy 19 NA.

MISSED APPROACH: Climb to 3700 direct FOORT and hold.

| ATIS | GREER APP CON ★ | GREENVILLE TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 127.075 | 118.8 270.275 | 119.9 (CTAF) L 257.7 | 121.25 | 122.95 |

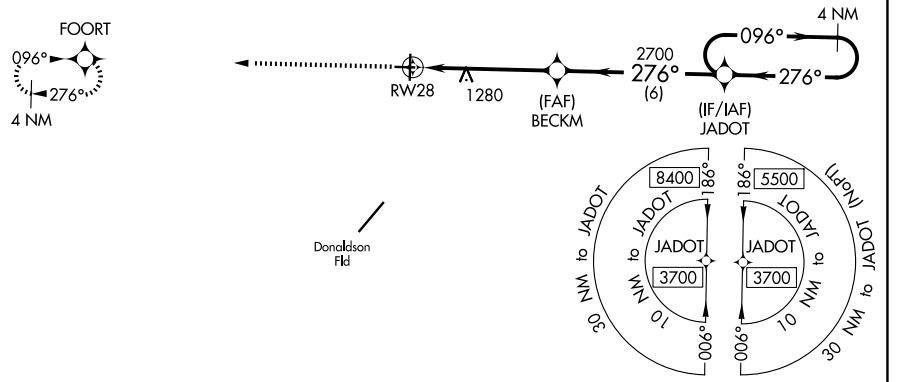


| ELEV | 1048 | D | TDZE | 1013 |
|---|---|---|---|---|




REIL Rwy 28
REIL Rwy 19 L
MIRL Rwy 10-28
HIRL Rwy 1-19 L

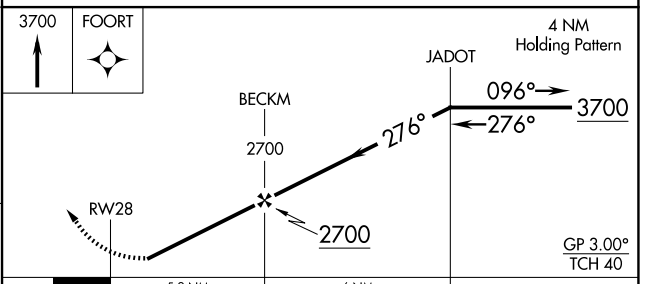


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1263-1 250 (300-1) | | | |
| LNAV/VNAV DA | 1463-1½ 450 (500-1½) | | | |
| LNAV MDA | 1540-1 527 (500-1) | | 1540-1½ 527 (500-1½) | |
| CIRCLING | 1620-1 572 (600-1) | | 1780-2 732 (800-2) | 1860-2¾ 812 (900-2¾) |



SE-2, 06 AUG 2026 to 03 SEP 2026
SE-2, 06 AUG 2026 to 03 SEP 2026