

JACKSONVILLE, FLORIDA

RNAV (RNP) Y RWY 28

APCH CRS	Rwy Idg	9003
276°	TDZE	13
	Arprt Elev	23

(USN)

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

RNP AR APCH-GPS




MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct ITEGE, track 156° to MADEN and hold.

▼ * When ALS inop, increase vis to 1 mile.

ATIS	APP CON/DEP CON	TOWER	GND CON	CLNC DEL	ASR/PAR
124.35 290.425	127.775 377.075	125.15 (CTAF) 340.2	128.6 336.4	134.775 353.675	

AUTHORIZATION REQUIRED

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (129°F).

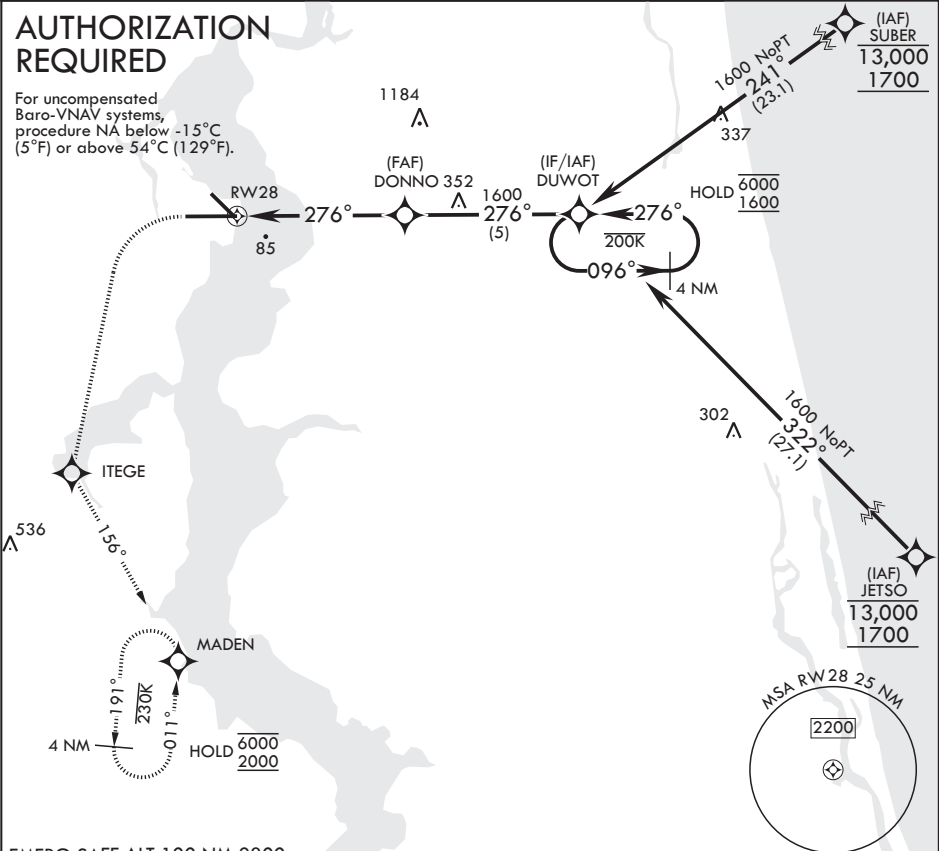

EMERG SAFE ALT 100 NM 2800

600 crs 276°	2000	ITEGE	tr 156°	MADEN	ELEV 23	See Supp for declared dist.	TDZE 13
CATEGORY					HIRL Rwy 10-28		
RNP 0.30 DA*							
A					B		
356-3/4					343		
C					D		
(400-3/4)							

JACKSONVILLE, FLORIDA

30°14'N - 81°41'W

JACKSONVILLE NAS (TOWERS FLD) (KNIP)

Amdt 2 02OCT25

RNAV (RNP) Y RWY 28

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026