


LOC/DME I-RLI 109.35	APP CRS 350°	Rwy Ldg TDZE 464 Apt Elev 501
Chan 30 (Y)		


ILS or LOC RWY 35L
LOUISVILLE MUHAMMAD ALI INTL (SDF)

DME required for LOC only. RADAR required.	ALSIF-2 	MISSED APPROACH: Climb to 1000 then climbing left turn to 4000 on heading 240° and IJU VORTAC R-279 to DAMEN INT/ IJU 24.5 DME and hold.
Simultaneous approach authorized. Circling Rwy 11 NA at night. For inop ALS, increase S-LOC 35L Cat C/D visibility to 1 3/4 SM.		

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

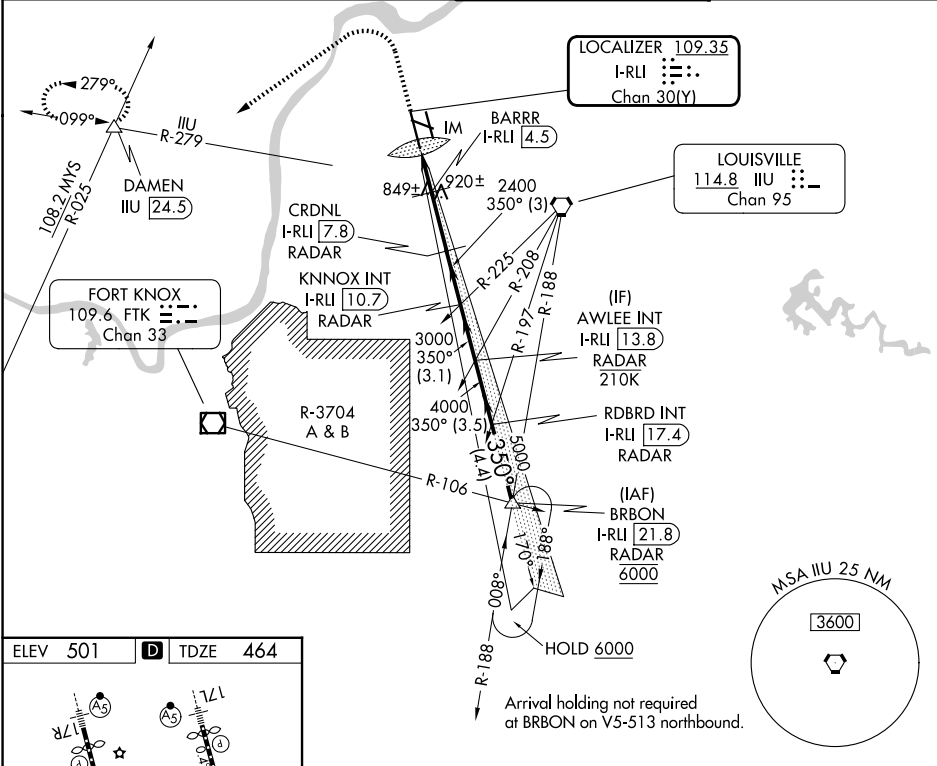

ELEV 501	D TDZE 464
-----------------	--------------------------

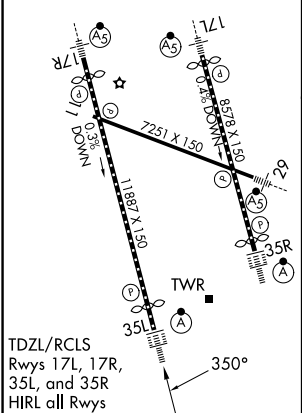

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

1000	4000	DAMEN IJU R-279	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 75).		AWLEE INT I-RLI 13.8
hdg 240°					
CATEGORY					
S-ILS 35L 664/18 200 (200-1/2)					
S-LOC 35L 1100/24 636 (600-1/2) 1100-1 3/8 636 (600-1 3/8)					
CIRCLING 1100-1 599 (600-1) 1140-1 639 (700-1) 1160-1 3/4 659 (700-1 3/4) 1400-3 899 (900-3)					

SE-1, 06 AUG 2026 to 03 SEP 2026

SE-1, 06 AUG 2026 to 03 SEP 2026