

WAAS CH 78328 W11A	APP CRS 107°	Rwy Idg TDZE Apt Elev 408
--	------------------------	--

RNAV (GPS) RWY 11


MILLINOCKET MUNI (MLT')

RNP APCH.

Baro-VNAV NA when using Houlton altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 41°C. Rwy 11 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Houlton altimeter setting and increase all DA and MDA 120 feet; increase LPV and LNAV/VNAV visibility all Cats ½ SM and LNAV visibility Cat B ¼ SM and Cat C/D ½ SM. Procedure NA at night.

MISSED APPROACH:
Climb to 2300 direct JEBIV and hold.

ASOS 135.225	BOSTON CENTER 120.25 346.4	UNICOM 122.8 (CTAF)
------------------------	--------------------------------------	-------------------------------

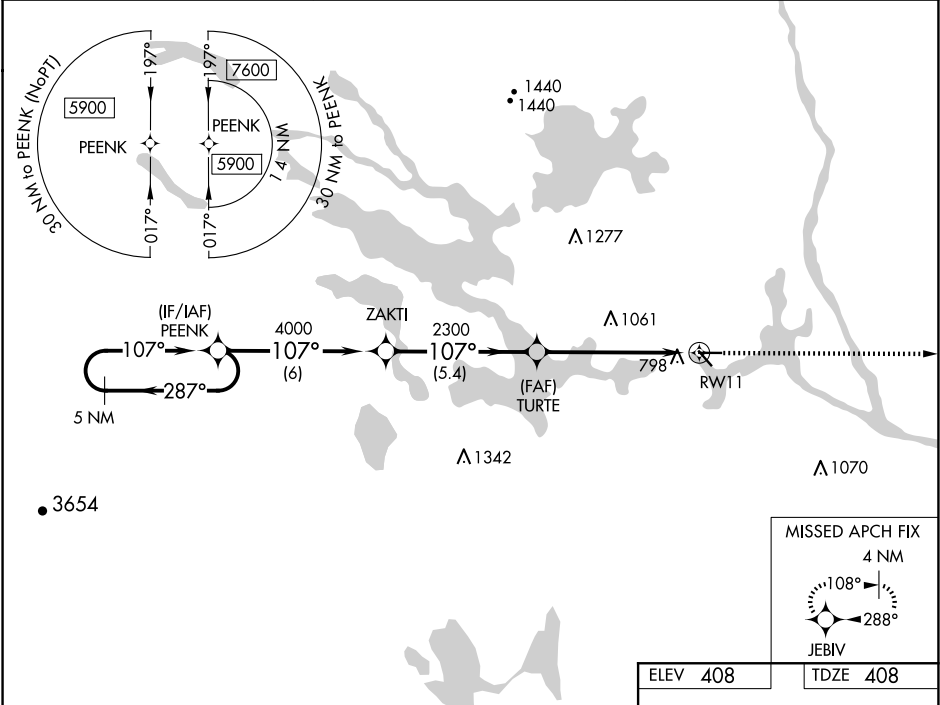

5 NM Holding Pattern				
5900 ← 287° / 107° →				
GP 3.00° TCH 51				
PEENK				
ZAKTI				
TURTE				
RW11				
Distances: 6 NM, 5.4 NM, 5.8 NM				
CATEGORY	A	B	C	D
LPV DA	929-134 521 (600-134)			
LNAV/VNAV DA	1004-2 596 (600-2)			
LNAV MDA	1100-1 692 (700-1)		1100-2 692 (700-2)	

ELEV 408

TDZE 408

REIL Rwy 29

MRL Rwy 11-29