ILS or LOC RWY 13

LAGUARDIA (LGA)

LOC/DME I-GDI	APP CRS	Rwy Ldg	7002
108.5	134°	TDZE	12
Chan 22		Apt Elev	21

Radar required for procedure entry. DME or RADAR required for LOC only.

For inop ALS, increase S-LOC 13 Cats C/D visibility to 2½ SM. Circling NA northwest of Rwy 4 and southwest of Rwy 13.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 2000 on LGA VOR/DME R-043 to GREKO INT/LGA 5.7 DME and hold, continue climb-in-hold to 2000.

D-ATIS	NEW YORK APP CON	LAGUARDIA TOWER	GND CON
125.95	120.8 322.35	118.7 322.35	121.7 322.35

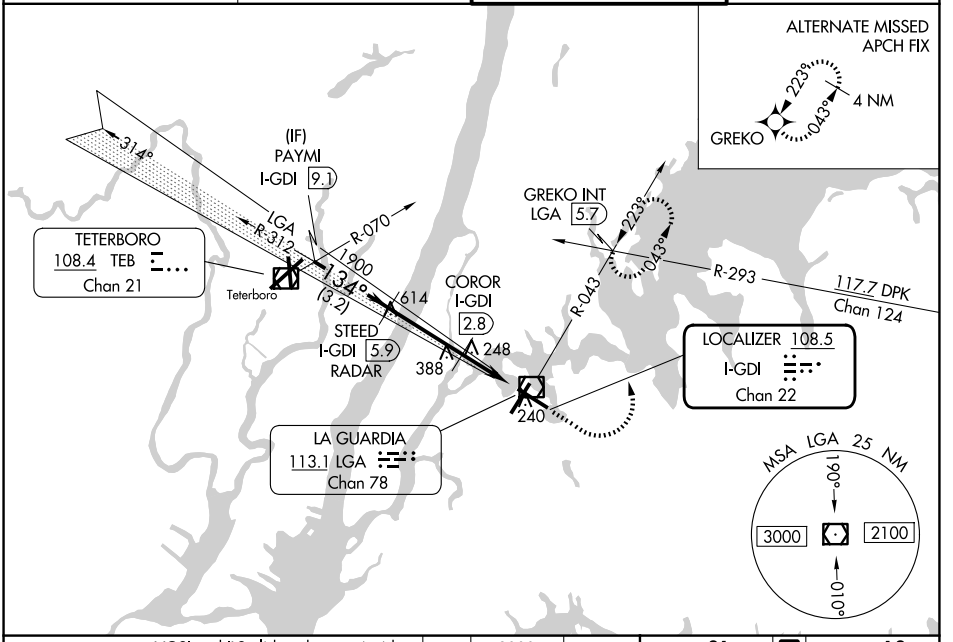

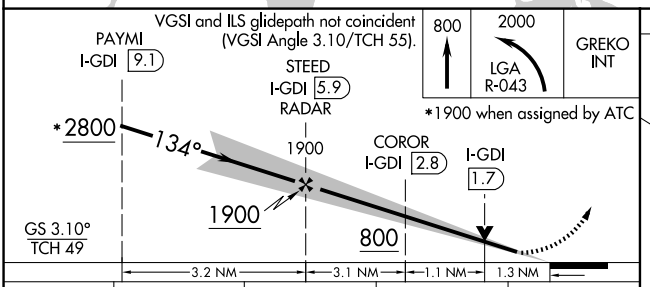

CATEGORY	A	B	C	D
S-ILS 13	212/18 200 (200-½)			
S-LOC 13	800/24 788 (800-½)	800/40 788 (800-¾)	800-1¾ 788 (800-1¾)	
CIRCLING	800-1 779 (800-1)	800-1¼ 779 (800-1¼)	1080-3 1059 (1100-3)	1260-3 1239 (1300-3)
COROR FIX MINIMUMS				
S-LOC 13	500/24 488 (500-½)		500/50 488 (500-1)	
CIRCLING	700-1 679 (700-1)		1080-3 1059 (1100-3)	1260-3 1239 (1300-3)

ELEV 21 D TDZE 12



TDZL/RCLS Rwys 4, 13 and 22
HIRL Rwys 4-22 and 13-31
REIL Rwy 31

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

NE-2, 06 AUG 2026 to 03 SEP 2026
NE-2, 06 AUG 2026 to 03 SEP 2026