


WAAS CH 42814 W14A	APP CRS 141°	Rwy Ldg TDZE 64 Apt Elev 64	6007
--	------------------------	---	-------------

RNAV (GPS) RWY 14

YUBA COUNTY (MYV)

RNP APCH - GPS.	MALSRL 	MISSED APPROACH: Climb to 4000 direct TUXUY and on track 251° to RADNE and on track 318° to YUBBA and hold, continue climb-in-hold to 4000.
▼ Circling Rwy 5, 23 NA at night. Baro-VNAV and VDP NA when using LHM altimeter setting. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, increase LNAV Cat C/D visibility to 1¼ SM. When local altimeter setting not received, use LHM altimeter setting and increase LPV DA to 307 feet. Increase LNAV/VNAV DA to 513 feet. Increase all MDAs 60 feet.		

ASOS 118.475	NORCAL APP CON 125.4 259.1	UNICOM 123.05 (CTAF) 
------------------------	--------------------------------------	--

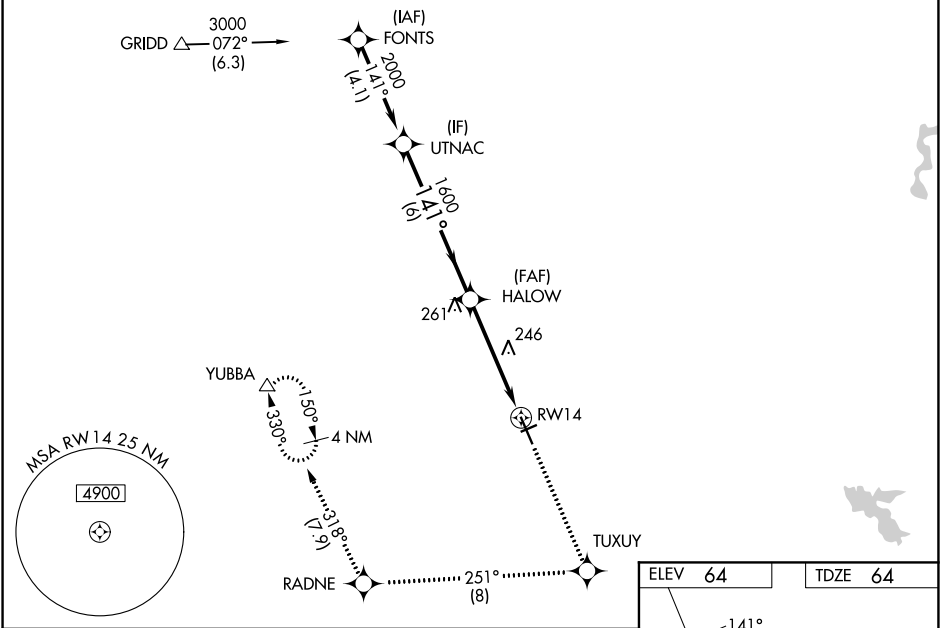

UTNAC		4000 ↑	TUXUY ✧	fr 251°	RADNE ✧	fr 318°	YUBBA △
2000							
GP 3.00° TCH 51							
		6 NM 3.4 NM 1.2 NM					
CATEGORY		A	B	C	D		
LPV DA		264-1			200 (200-1)		
LNAV/ VNAV DA		470-1			406 (500-1)		
LNAV MDA		500-1			436 (500-1)		
CIRCLING		540-1 476 (500-1)			560-1½ 496 (500-1½)		640-2 576 (600-2)

