APP CRS	Rwy Ldg	4499
309°	TDZE	1715
	Apt Elev	1723

RNAV (GPS) RWY 31

CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

RNP APCH-GPS.

Rwy 31 Straight-in/Circling and Circling to Rwy 13 NA at night.
When local altimeter setting not received, use Dunkirk altimeter setting: increase all MDAs 200 feet and visibility LNAV Cats C/D ⅞ SM, Circling Cat C ½ SM and Circling Cat D ¾ SM. Helicopter visibility reduction below 1 SM NA.

NA

MISSED APPROACH: Climb to 4000 direct CRYST WP and hold.

AWOS-3PT	BUFFALO APP CON ★	UNICOM
118.425	126.05	122.975 (CTAF) L

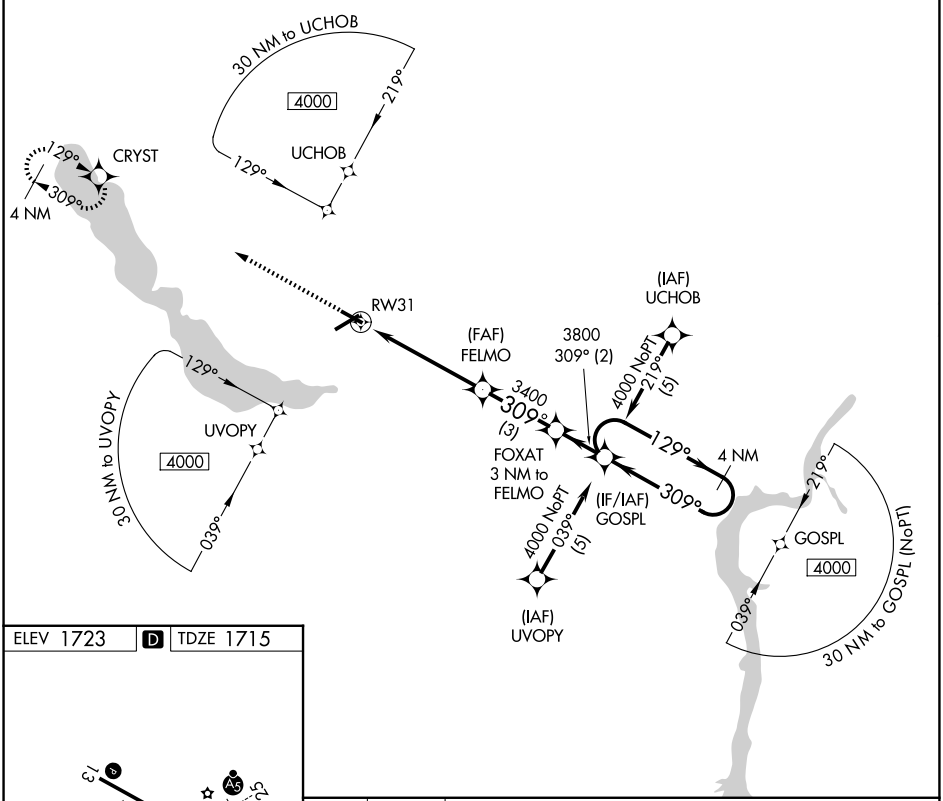

ELEV 1723 D TDZE 1715



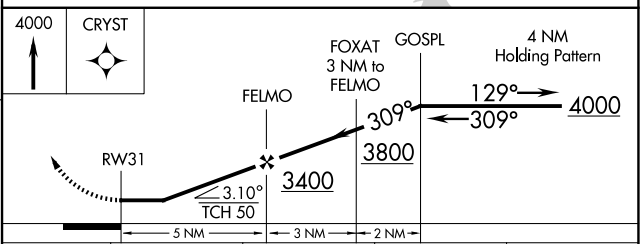

CATEGORY	A	B	C	D
LNAV MDA	2200-1	485 (500-1)	2200-1¼ 485 (500-1¼)	2200-1½ 485 (500-1½)
CIRCLING	2200-1	477 (500-1)	2260-1½ 537 (600-1½)	2340-2 617 (700-2)

REIL Rwy 31 L
MIRL Rwy 13-31 L
HIRL Rwy 7-25 L

NE-2, 06 AUG 2026 to 03 SEP 2026