

VOR or TACAN-B

VORTAC HNL 114.8 Chgn 95	APCH CRS 319°	Rwy Idg N/A TDZE N/A Arpt Elev 843
--	-------------------------	---

[USA]

WHEELER AAF (PHHI)

DME required


T *Circling not authorized N Rwy 6-24 when class D surface area is VFR.
Circling to Rwy 24 not authorized at night.

† MISSED APPROACH: Climb to 3000, then right turn via heading 180° and HNL VORTAC R-319 to cross TACHI INT/HNL 7 DME at 6000, then via HNL VORTAC R-319 to HNL VORTAC and hold.


ATIS 119.675 242.4	HCF APP CON 118.3 269.0	TOWER ★ 126.3(CTAF) 235.625	GND CON 41.5 FM 121.85 237.5
------------------------------	-----------------------------------	---------------------------------------	--

Knots	60	120	180	240	300	360
V/V(fpm)	545	1090	1635	2180	2725	3270
Min climb of 545 ft/NM to 6000 - Controlling Obstacle 2704						

† For TACAN equipped aircraft continue via HNL VORTAC R-171 to ALANA INT/HNL13.9 DME and hold. Hold S, RT, 351° inbound.

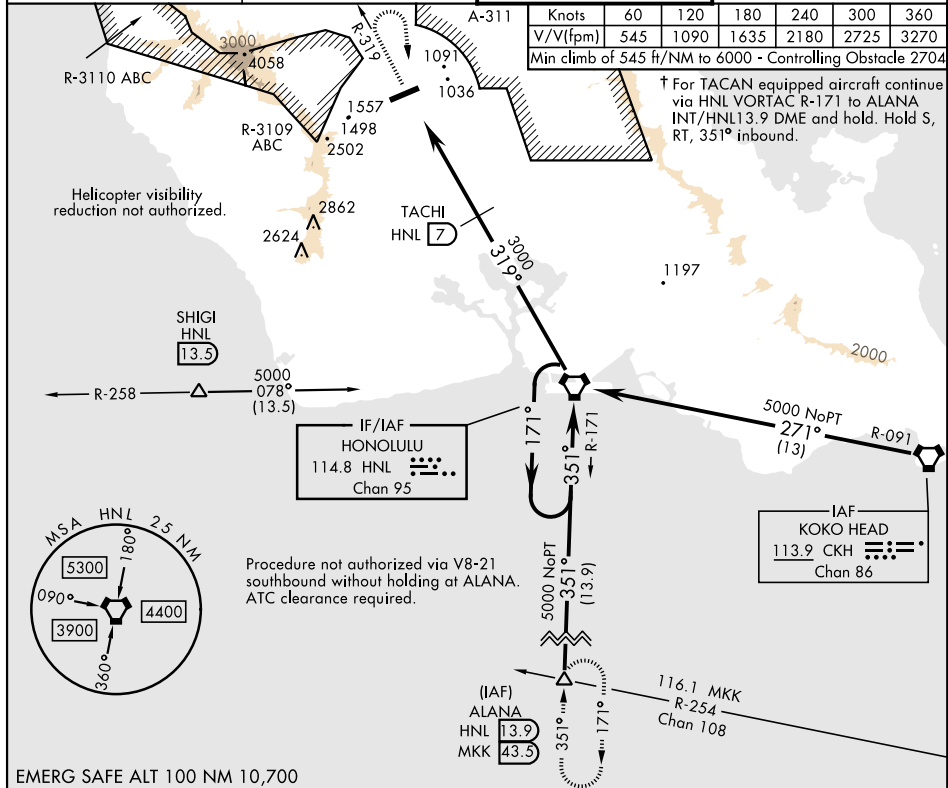

EMERG SAFE ALT 100 NM 10,700

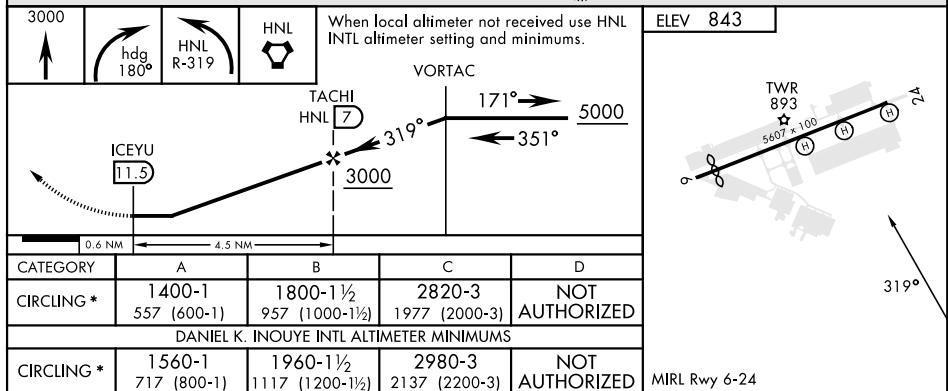

WAHIAWA, OAHU I, HAWAII

21° 29'N-158° 02'W

WHEELER AAF (PHHI)

Amdt 4 07SEP23

VOR or TACAN-B

PAC, 09 JUL 2026 to 03 SEP 2026

PAC, 09 JUL 2026 to 03 SEP 2026