



APP CRS 094°	Rwy Ldg TDZE Apt Elev	9501 1016 1027
------------------------	-----------------------------	---

RNAV (RNP) Z RWY 9
KANSAS CITY INTL (MCI)

RNP AR APCH - GPS.		 MALSR	MISSED APPROACH: Climb to 4000 direct DUSTN and on track 092° LYMES and hold.		
 For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4500; increase RNP 0.30 all Cats visibility to RVR 6000.					
D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC

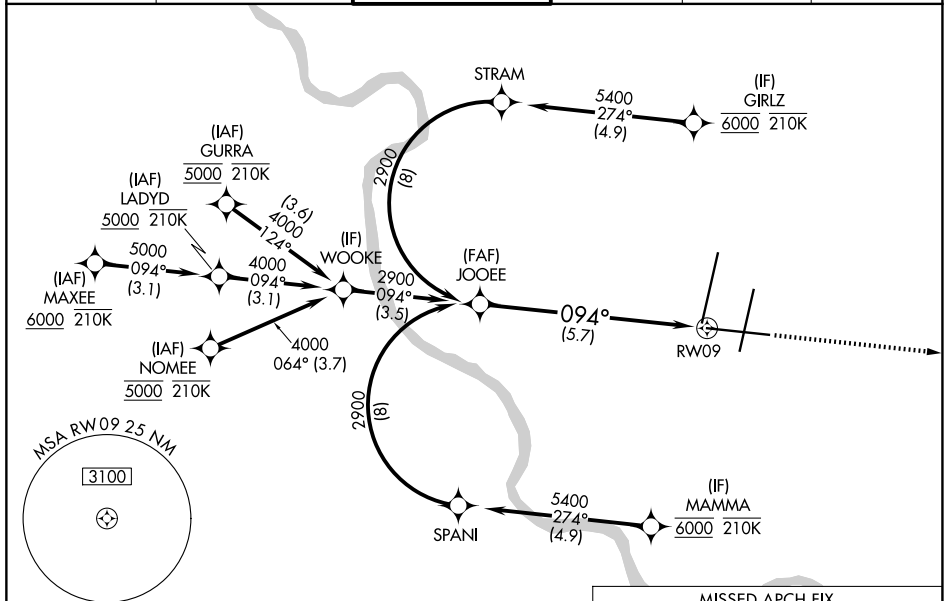

ELEV 1027	D	TDZE 1016
-----------	----------	-----------

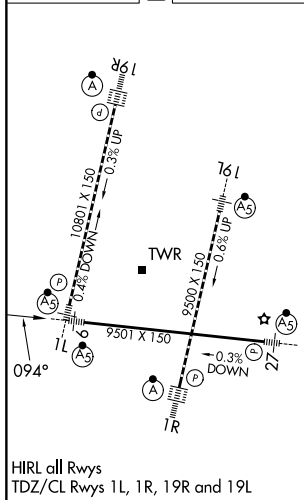

MISSED APCH FIX

DUSTN 092° (21.8) LYMES 272°

(not to scale) 4 NM

JOOEE
2900

2900

GP 3.00°
TCH 56

094°

5.7 NM

RW09

4000
↑

DUSTN

tr
092°

LYMES
△

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.20 DA	1319/24 303 (300-½)			
RNP 0.30 DA	1418/40 402 (400-¾)			

AUTHORIZATION REQUIRED