

LOC/DME I-CGI
109.5
Chan **32**

APP CRS
108°

Rwy Ldg
TDZE **337**
Apt Elev **342**


ILS or LOC RWY 10
CAPE GIRARDEAU RGNL (CGI)

ADF required.
For inop ALS, increase S-LOC 10 Cat C/D visibility to 1½ SM.

MALSR
A5

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct DUTCH LOM/I-CGI 7.2 DME and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) 0	GND CON 124.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

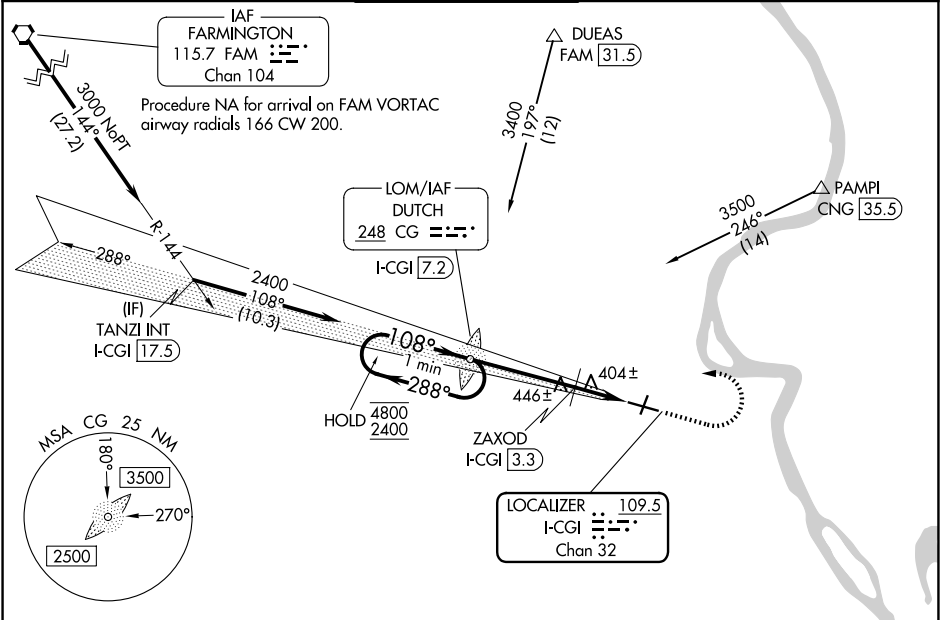

Use I-CGI DME when on the localizer course.
One Minute Holding Pattern

4800
2400

←288°

108°→

2400

2271

CG DUTCH LOM I-CGI [7.2]

ZAXOD I-CGI [3.3]

I-CGI [2]

I-CGI [1.3]

1000

3.9 NM

1.2 NM

0.8 NM

GS 3.00°
TCH 54

CATEGORY	A	B	C	D
S-ILS 10	537-½ 200 (200-½)			
S-LOC 10	1000-½	663 (700-½)	1000-1½	663 (700-½)
CIRCLING	1000-1	658 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)
ZAXOD FIX MINIMUMS				
S-LOC 10	660-½ 323 (400-½)			
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)

ELEV 342 **D** TDZE 337

MIRL Rwy 2-20
HIRL Rwy 10-28

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58