


WAAS CH 45910 W26A	APP CRS 259°	Rwy Ldg 5086 TDZE 174 Apt Elev 192
--	------------------------	---

RNAV (GPS) RWY 26

ILIAMNA (ILI) (PAIL)

RNP APCH - GPS.		MISSED APPROACH: Climb to 600, then climbing left turn to 7000 direct NUTUW and hold, continue climb-in-hold to 7000.
For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. When local altimeter setting not received, procedure NA. Circling NA to waterways N, S, E, W.		
AFIS 134.95	ANCHORAGE CENTER 118.8	ILIAMNA RADIO 123.6 (CTAF) 0

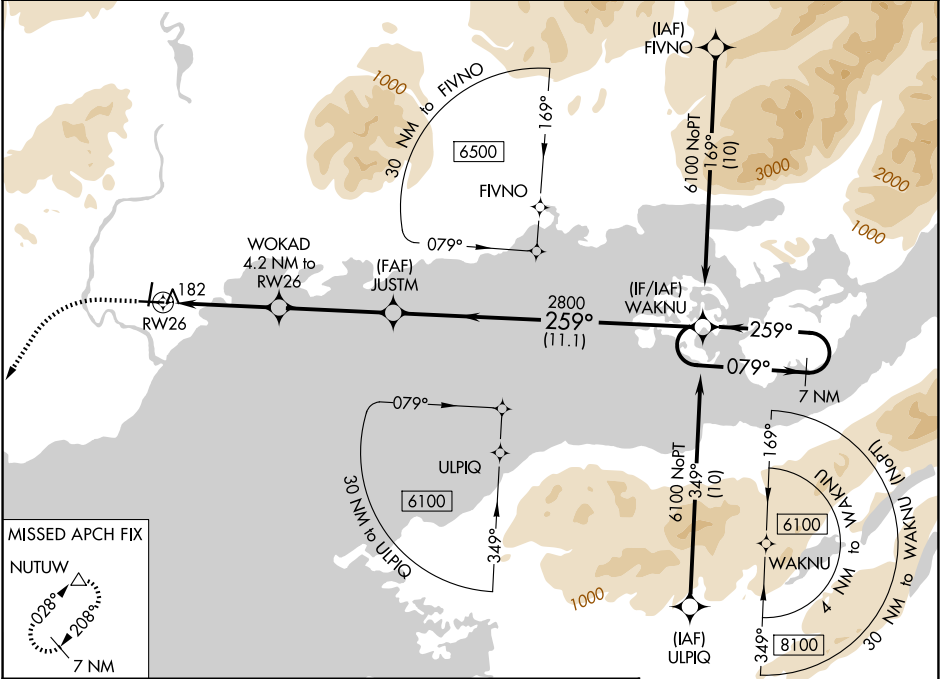

MISSED APCH FIX NUTUW 7 NM		ELEV 192		TDZE 174	
600		7000		NUTUW	
0.8 NM		3.3 NM		4.1 NM	
1500		2800		6100	
WOKAD 4.2 NM to RW26		JUSTM		WAKNU	
RW26		259°		079°	
GP 3.00°		TCH 35		7 NM Holding Pattern	
CATEGORY	A	B	C	D	
LPV DA	424-1	250 (300-1)			
LNAV/VNAV DA	424-1	250 (300-1)			
LNAV MDA	440-1	266 (300-1)			
CIRCLING	740-1	548 (600-1)	820-1¾ 628 (700-1¾)	1700-3 1508 (1600-3)	

