

|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Ldg  | 9400 |
| 011°    | TDZE     | 296  |
|         | Apt Elev | 312  |

RNAV (RNP) Z RWY 1L

WASHINGTON DULLES INTL (IAD)


RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.


ALSF-2

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct NHLEN and hold.

|        |                             |                                       |                      |
|--------|-----------------------------|---------------------------------------|----------------------|
| D-ATIS | POTOMAC APP CON             | DULLES TOWER                          | GND CON              |
| 134.85 | 120.45 306.925 (241°-330°)  | 120.1 317.8 (Rwy 1R/19L)              | 121.9 317.8 (EAST)   |
|        | 128.525 306.925 (091°-240°) | 120.25 348.6 (Rwy 1C/19C)             | 121.625 348.6 (WEST) |
|        | 126.1 338.25 (331°-090°)    | 134.425 348.6 (Rwys 1L/19R and 12/30) |                      |

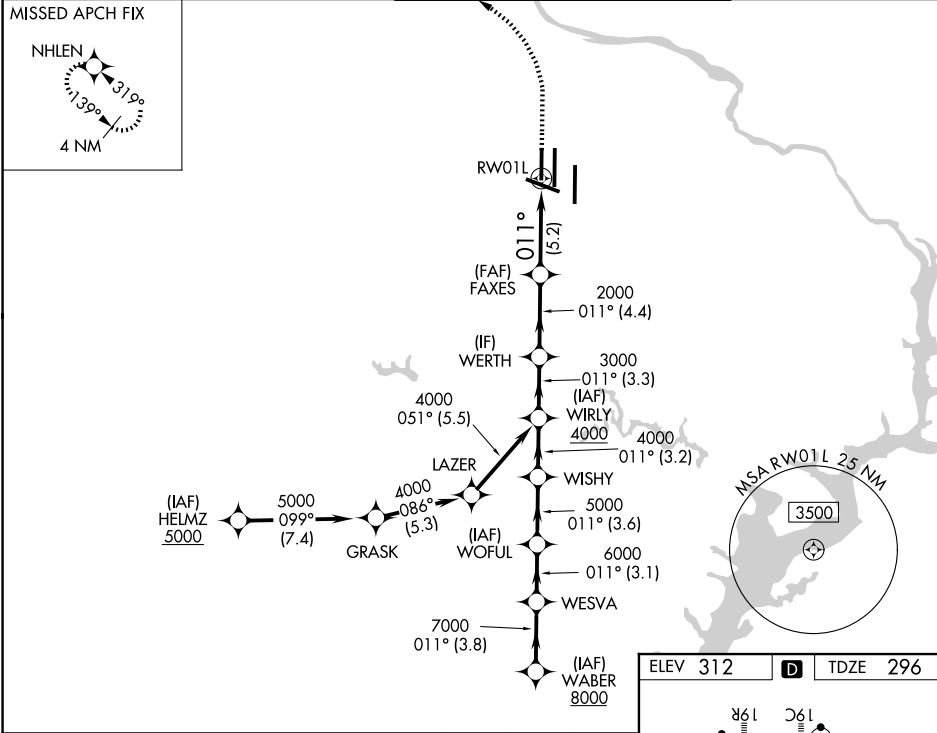

|                                                                   |        |             |        |
|-------------------------------------------------------------------|--------|-------------|--------|
| VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 70°). |        |             |        |
| WABER                                                             | WESVA  | WOFUL       | WISHY  |
| 8000                                                              | 7000   | 6000        | 5000   |
| GP 3.00°                                                          |        |             |        |
| TCH 55                                                            |        |             |        |
| 3.8 NM                                                            | 3.1 NM | 3.6 NM      | 3.2 NM |
| 3.3 NM                                                            | 4.4 NM | 5.2 NM      |        |
| CATEGORY                                                          | A      | B           | C      |
| RNP 0.11 DA                                                       | 572/24 | 276 (300-½) |        |
| RNP 0.30 DA                                                       | 710/40 | 414 (400-¾) |        |
| AUTHORIZATION REQUIRED                                            |        |             |        |

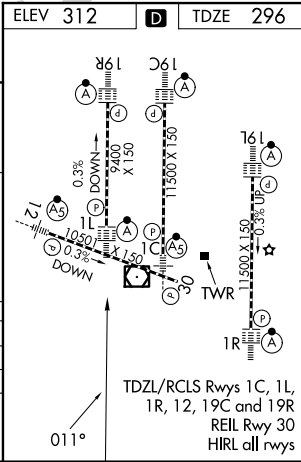

NE-3, 06 AUG 2026 to 03 SEP 2026

NE-3, 06 AUG 2026 to 03 SEP 2026