



WAAS CH 45921 W20A	APP CRS 195°	Rwy Ldg TDZE 757 Apt Elev 759
--	------------------------	---

RNAV (GPS) RWY 20R

DUPAGE (DPA)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2500 direct FABUG and 187° track to JOT VOR/DME and hold.
▼ ▲ Circling Rwy 15, 28, 33 NA at night. Rwy 20R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.	

ATIS 132.075	CHICAGO APP CON 133.5 349.0	DUPAGE TOWER 120.9 257.8	GND CON 121.8
------------------------	---------------------------------------	------------------------------------	-------------------------

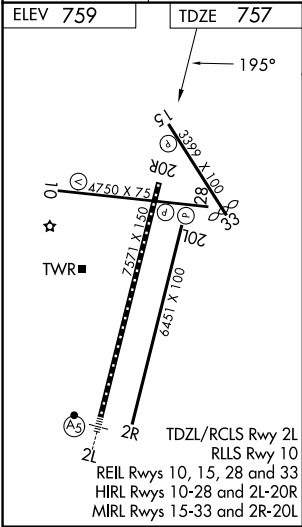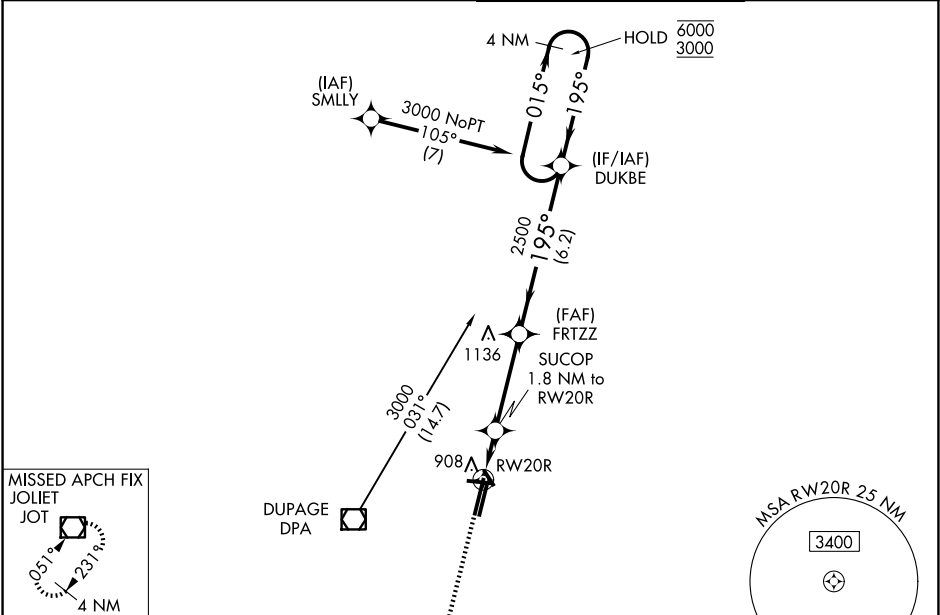

ELEV 759	TDZE 757	2500	FABUG	tr 187°	JOT	4 NM Holding Pattern
		SUCOP 1.8 NM to RW20R		FRTZZ 2500	DUKBE	015° → 6000 ← 195° 3000
		1.1 NM to RW20R		2500	GP 3.00° TCH 40	
		1.1 NM	0.6	3.6 NM	6.2 NM	
CATEGORY	A	B	C	D		
LPV DA	1043-7/8		286 (300-7/8)			
LNAV/VNAV DA	1080-1		323 (400-1)			
LNAV MDA	1160-1 403 (500-1)		1160-1 1/8 403 (500-1 1/8)			
CIRCLING	1260-1 501 (600-1)		1360-1 601 (700-1)		1460-2 701 (800-2) 1460-2 1/4 701 (800-2 1/4)	

EC-3, 06 AUG 2026 to 03 SEP 2026

EC-3, 06 AUG 2026 to 03 SEP 2026