

|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-RVS | APP CRS | Rwy Ldg  | 5101 |
| 109.95        | 010°    | TDZE     | 626  |
| Chan 36 (Y)   |         | Apt Elev | 638  |

ILS or LOC RWY 1L  
TULSA RIVERSIDE (RVS)


▼

▲


Circling NA northeast of Rwys 31 and 19L.

MISSED APPROACH: Climb to 1500 then climbing left turn to 2600 on heading 280° and TUL VORTAC R-238 to KEVIL INT/TUL 25.4 DME and hold.

|               |                        |                                     |                  |                  |
|---------------|------------------------|-------------------------------------|------------------|------------------|
| ATIS<br>126.5 | TULSA APP CON<br>134.7 | RIVERSIDE TOWER ★<br>120.3 (CTAF) 0 | GND CON<br>121.7 | UNICOM<br>122.95 |
|---------------|------------------------|-------------------------------------|------------------|------------------|

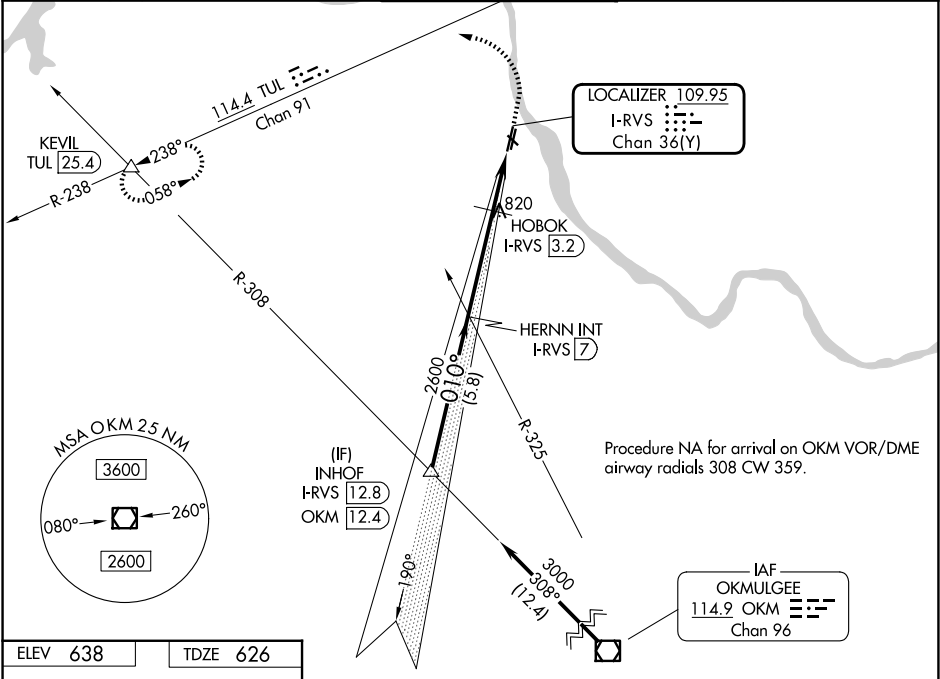

|          |          |
|----------|----------|
| ELEV 638 | TDZE 626 |
|----------|----------|

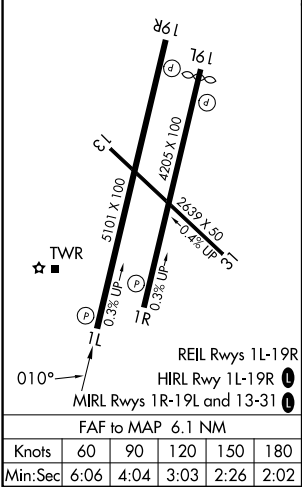

|                    |                       |                        |                        |                        |           |
|--------------------|-----------------------|------------------------|------------------------|------------------------|-----------|
|                    | INHOE I-RVS 12.8      | HERNN INT I-RVS 7      | HOBOK I-RVS 3.2        | I-RVS 2.2              | I-RVS 0.9 |
|                    | 3000                  | 2600                   | 1380                   |                        |           |
|                    | GS 3.00°              |                        |                        |                        |           |
|                    | TCH 48                |                        |                        |                        |           |
|                    | 5.8 NM                | 3.8 NM                 | 1 NM                   | 1.3 NM                 |           |
| CATEGORY           | A                     | B                      | C                      | D                      |           |
| S-ILS 1L           | 826-3/4 200 (200-3/4) |                        |                        |                        |           |
| S-LOC 1L           | 1380-1 754 (800-1)    | 1380-1 754 (800-1 1/4) | 1380-2 742 (800-2 1/4) | 1380-2 742 (800-2 1/2) |           |
| CIRCLING           | 1380-1 742 (800-1)    | 1380-1 742 (800-1 1/4) | 1380-2 742 (800-2 1/4) | 1380-2 742 (800-2 1/2) |           |
| HOBOK FIX MINIMUMS |                       |                        |                        |                        |           |
| S-LOC 1L           | 1080-1 454 (500-1)    | 1080-1 454 (500-1)     | 1080-1 454 (500-1)     | 1080-1 454 (500-1)     |           |
| CIRCLING           | 1260-1 622 (700-1)    | 1280-1 642 (700-1)     | 1280-1 642 (700-1 1/4) | 1380-2 742 (800-2 1/2) |           |