
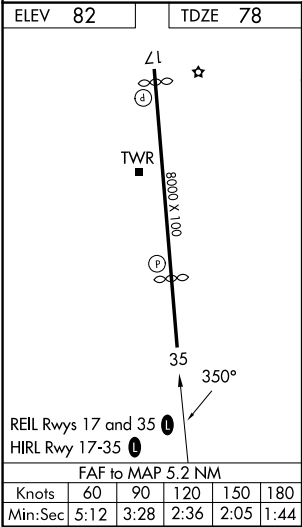


LOC/DME I-TXH 110.7 Chan 44	APP CRS 350°	Rwy Ldg TDZE 78 Apt Elev 82
---	------------------------	---

ILS or LOC RWY 35
SUGAR LAND RGNL (SGR)

DME required. RADAR required for procedure entry.	MISSED APPROACH: Climb to 900 then climbing left turn to 2000 on I-TXH localizer south course to HULLO/I-TXH 6.3 DME and hold.
VDP NA when using William P Hobby altimeter setting. When local altimeter setting not received, use William P Hobby altimeter setting and increase all DA 51 feet and all MDA 60 feet and S-LOC 35 Cat C/D visibility 1/8 mile, and Circling Cat C/D visibility 1/4 mile.	

D-ATIS 118.125	HOUSTON APP CON 123.8 257.7	SUGAR LAND TOWER ★ 118.65 (CTAF) 0	GND CON 121.4	UNICOM 122.95
--------------------------	---------------------------------------	--	-------------------------	-------------------------

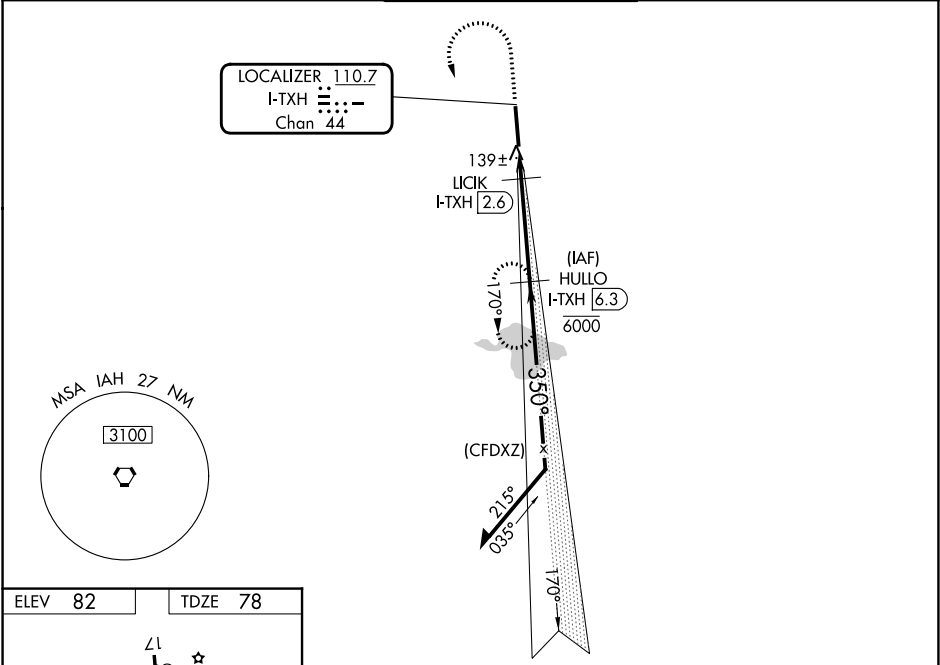

900 ↑	2000 ↙ I-TXH S crs	HULLO I-TXH <u>6.3</u>	*600 when using William P Hobby altimeter setting.	
*LOC only.			6000	Remain within 10 NM
I-TXH <u>1.1</u>			1800	170°
*I-TXH <u>1.9</u>			2200	350°
I-TXH <u>2.6</u>			1800	GS 3.00° TCH 56
*540				
0.9 NM			0.7 NM	3.7 NM
CATEGORY	A	B	C	D
S-ILS 35	278-3/4 200 (200-3/4)			
S-LOC 35	400-1 322 (400-1)			
CIRCLING	720-1	638 (700-1)	720-13/4 638 (700-13/4)	720-2 638 (700-2)