

WAAS CH 72619 W18A	APP CRS 183°	Rwy Ldg TDZE 173 Apt Elev 173
--	------------------------	---

RNAV (GPS) RWY 18

FLETCHER FLD (CKM)

RNP APCH-GPS.



▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Tunica altimeter setting. When local altimeter setting not received, use Tunica altimeter setting: increase LPV DA to 483 feet, LNAV/VNAV DA to 647 feet and all MDA 60 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, and LNAV Cat C/D visibility ½ SM. Circling Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2000 direct HULON and hold.

AWOS-3 120.675	MEMPHIS CENTER 135.3 335.8	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

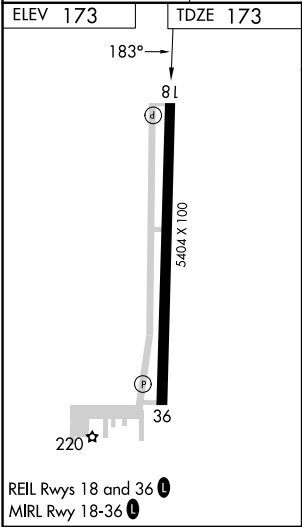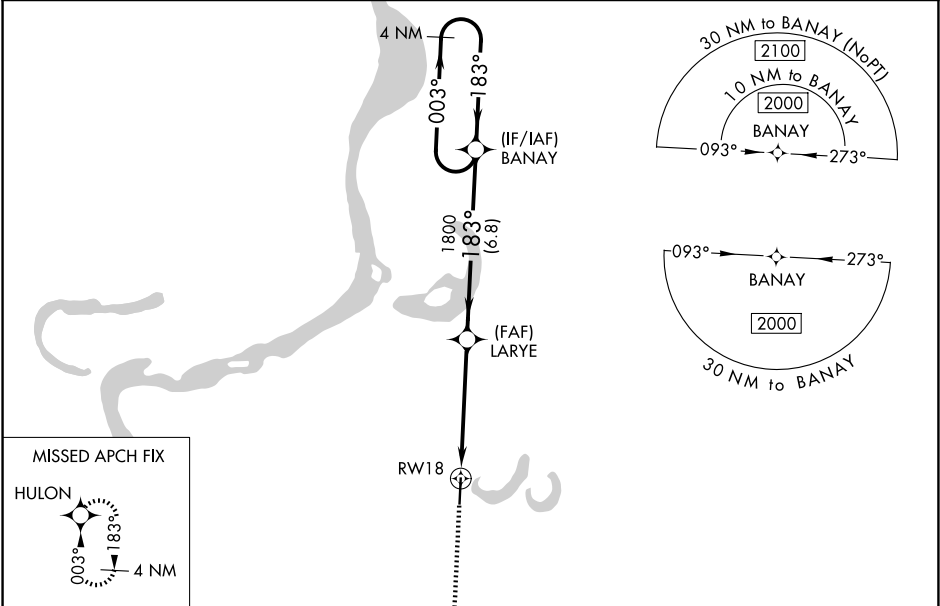

	2000	HULON				4 NM Holding Pattern
			LARYE	BANAY		
			1.4 NM to RW18	1800	183°	003° → 2000 ← 183°
			1.4 NM	3.6 NM	6.8 NM	GP 3.00° TCH 40
CATEGORY	A	B	C	D		
LPV DA		423-7⁄8	250 (300-7⁄8)			
LNAV/VNAV DA		587-13⁄8	414 (500-13⁄8)			
LNAV MDA	640-1	467 (500-1)	640-13⁄8	467 (500-13⁄8)		
CIRCLING	740-1	567 (600-1)	780-13⁄4 607 (700-13⁄4)	780-2 607 (700-2)		