

WAAS CH 87013 W18A	APP CRS 177°	Rwy Idg 5500 TDZE 213 Apt Elev 213
--	------------------------	---


RNAV (GPS) RWY 18
JASPER COUNTY/BELL FLD (JAS)

RNP APCH-GPS.

T Baro-VNAV NA when using De Ridder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 18 helicopter visibility reduction below ¾ SM NA. VDP NA when using De Ridder altimeter setting. When local altimeter setting not received, use De Ridder altimeter setting and increase LPV DA to 654 feet and all visibilities ¾ SM. Increase LNAV/VNAV DA to 817 feet and all visibilities ¾ SM. Increase all MDAs 100 feet and LNAV visibility Cat C ¾ SM, and Circling visibility Cat C ½ SM.

**MISSED
APPROACH:**
Climb to 3000
direct BRIR
and hold.

AWOS-3 118.375	HOUSTON CENTER 126.95 363.05	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

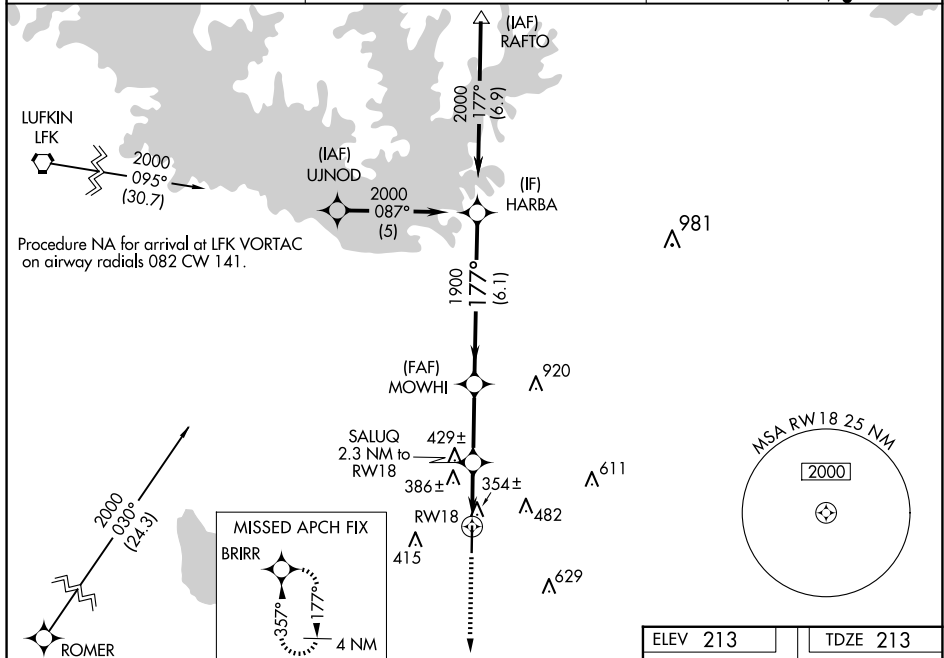

CATEGORY	A	B	C	D
LPV DA		567-1	354 (400-1)	NA
RNAV/VNAV	DA	730-1 $\frac{3}{8}$	517 (600-1 $\frac{3}{8}$)	NA
RNAV MDA		700-1	487 (500-1) 700-1 $\frac{3}{8}$ 487 (500-1 $\frac{3}{8}$)	NA
CIRCLING		740-1	527 (600-1) 800-1 $\frac{1}{2}$ 587 (600-1 $\frac{1}{2}$)	NA

