


LOC/DME I-SCC 109.3 Chan 30	APP CRS 238°	Rwy Ldg TDZE Apt Elev 6500 66 67
--	------------------------	--

LOC BC RWY 24
DEADHORSE (SCC) (PASC)

DME required. For inop ALS, increase *S-LOC 24 Cat E visibility to RVR 5000 and S-LOC 24 Cat C/D/E visibility to RVR 5500.	MALSR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 4000 on heading 100° and SCC VOR/DME R-144 to UVALL/SCC VOR/DME 16 DME and hold. *Missed approach requires minimum climb of 243 feet per NM to 780.
---	-----------	--

AFIS 118.4	ANCHORAGE CENTER 134.4 370.9	DEADHORSE RADIO 123.6 (CTAF) 0
----------------------	--	--

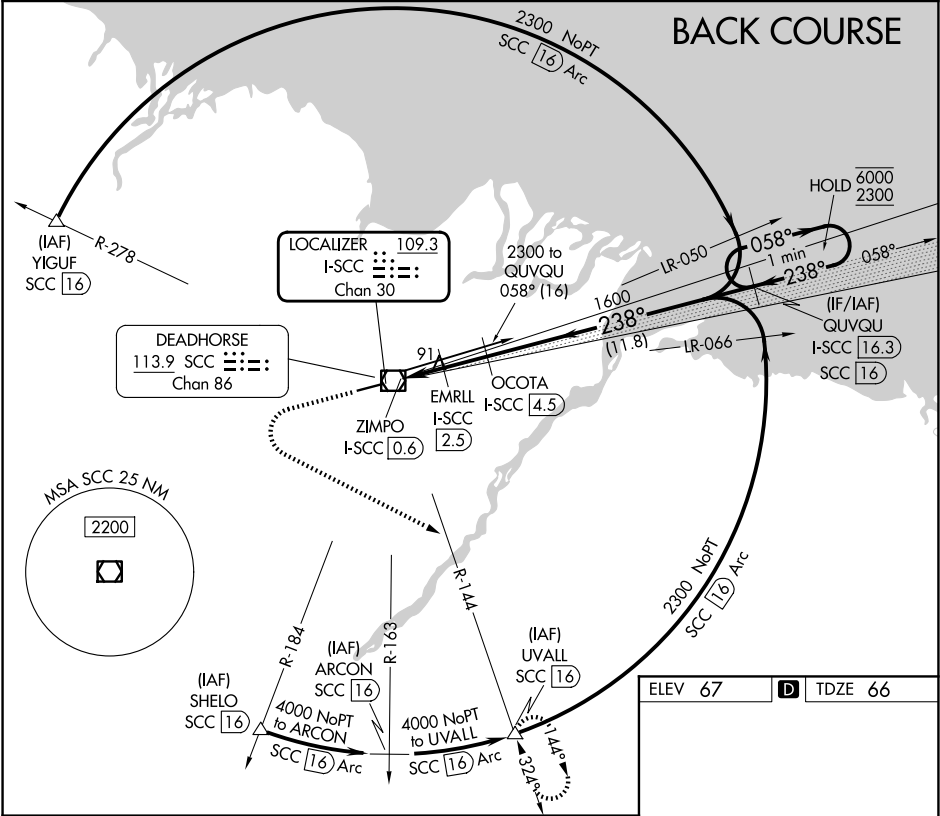

1500 4000 hdg 100°	SCC R-144 △	UVALL △	Use I-SCC DME when on the localizer course.	QUVQU I-SCC 16.3	One Minute Holding Pattern
EMRLL I-SCC 2.5	OCOTA I-SCC 4.5	91 EMRLL I-SCC 2.5	3.00° TCH 54	1600	058° 238° 6000 2300
ZIMPO I-SCC 0.6	980	1600	238°	058°	Disregard GS indications.
0.8	1.9 NM	2 NM	11.8 NM		
CATEGORY	A	B	C	D	E
S-LOC 24*	360/24 294 (300-½)				
S-LOC 24	420/24	354 (400-½)	420/30	354 (400-½)	
CIRCLING	540-1	473 (500-1)	580-1½ 513 (600-1½)	620-2	553 (600-2)

