

|           |         |          |      |
|-----------|---------|----------|------|
| LOC I-BZQ | APP CRS | Rwy Ldg  | 5701 |
| 111.5     | 320°    | TDZE     | 179  |
|           |         | Apt Elev | 187  |

ILS or LOC RWY 32  
STATESBORO-BULLOCH COUNTY (TBR)

ADF required.

▼



▲

Circling to Rwy 6, 24 NA at night. When local altimeter setting not received, use JYL altimeter setting and increase S-ILS 32 DA to 408 feet; increase all MDAs 40 feet; and Circling visibility Cat C ¼ SM. For inop ALS, increase S-LOC 32 Cat C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1300 then climbing right turn to 2000 direct BZQ NDB and hold.

|                   |                                     |                            |
|-------------------|-------------------------------------|----------------------------|
| AWOS-3<br>119.025 | SAVANNAH APP CON ★<br>118.4 307.225 | UNICOM<br>122.725 (CTAF) 0 |
|-------------------|-------------------------------------|----------------------------|

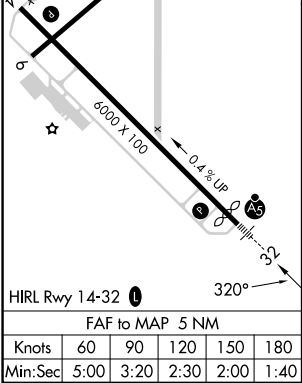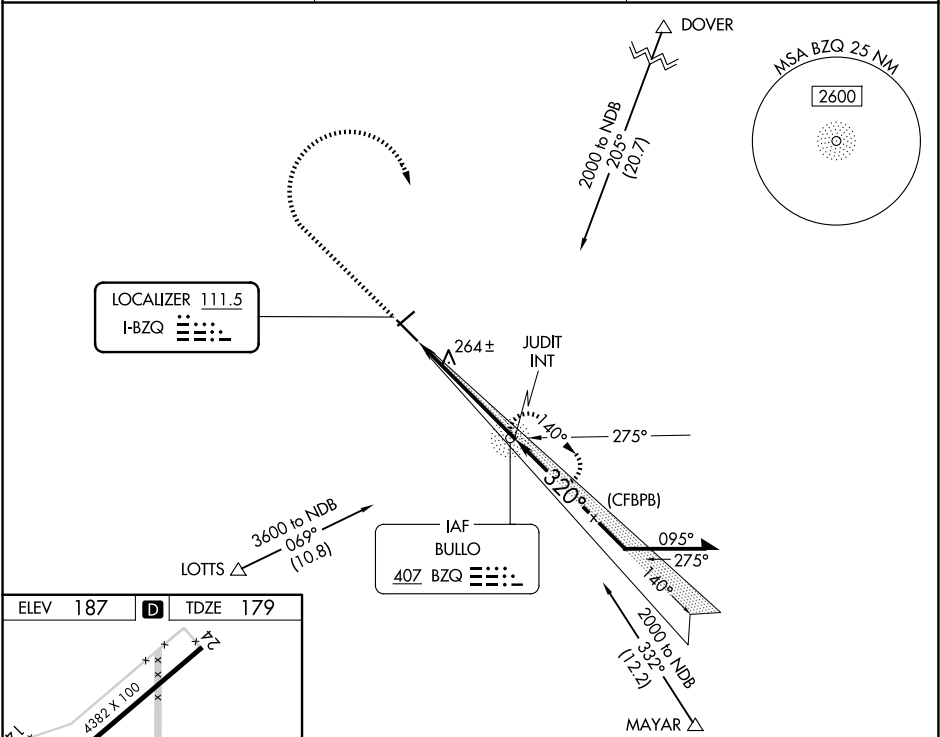

|          |                      |                      |                            |                            |
|----------|----------------------|----------------------|----------------------------|----------------------------|
| 1300     | 2000                 | BZQ                  | BZQ NDB                    | Remain within 10 NM        |
|          |                      |                      |                            |                            |
|          |                      |                      | JUDIT INT                  | 140°                       |
|          |                      |                      | 1800                       | 2000                       |
|          |                      |                      | 320°                       | 1800                       |
|          |                      |                      | GS 3.00°                   | TCH 49                     |
| 5 NM     |                      |                      |                            |                            |
| CATEGORY | A                    | B                    | C                          | D                          |
| S-ILS 32 | 379-½ 200 (200-½)    |                      |                            |                            |
| S-LOC 32 | 520-½                | 341 (400-½)          | 520-5/8                    | 341 (400-5/8)              |
| CIRCLING | 640-1<br>453 (500-1) | 740-1<br>553 (600-1) | 840-13/4<br>653 (700-13/4) | 860-21/4<br>673 (700-21/4) |

SE-4, 06 AUG 2026 to 03 SEP 2026

SE-4, 06 AUG 2026 to 03 SEP 2026