


WAAS CH 42635 W20A	APP CRS 198°	Rwy Ldg TDZE Apt Elev	5000 262 262
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 20
KENNETT MEML (TKX)

RNP APCH-GPS.	⚠ Circling to Rwy 18/36 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA west of Rwy 2 and 18. When local altimeter setting not received, use Blytheville altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LPV visibility 1/8 mile all Cats; increase LNAV/VNAV visibility 1/4 mile all Cats; increase LNAV Cat C/D and Circling Cat D visibility 1/4 mile. Rwy 20 helicopter visibility reduction below 3/4 SM NA. VDP and Baro-VNAV NA when using Blytheville Muni altimeter setting.	MISSED APPROACH: Climb to 2500 direct COSAD and hold.
---------------	---	--

AWOS-3PT 119.05	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

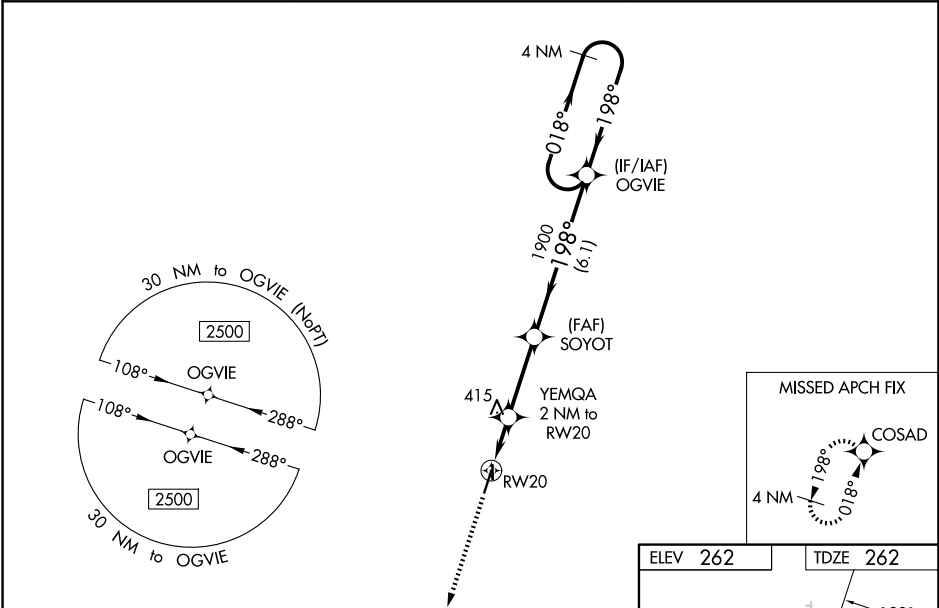

2500	COSAD	SOYOT	OGVIE	4 NM Holding Pattern	2500
*LNAV only.	YEMQA 2 NM to RW20	1900	198°	018°	198°
1.2 NM to RW20		920	1900		GP 3.00° TCH 40
1.2 NM	0.8 NM	3 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	554-1	292 (300-1)			
LNAV/VNAV DA	602-1 1/8	340 (400-1 1/8)			
LNAV MDA	680-1	418 (500-1)	680-1 1/8	418 (500-1 1/8)	
CIRCLING	680-1 418 (500-1)	720-1 458 (500-1)	720-1 1/2 458 (500-1 1/2)	900-2 638 (700-2)	

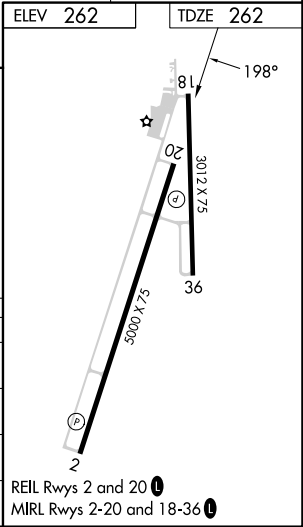

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026