RNAV (GPS) RWY 19

TRI-COUNTY AT HENRY JOYNER FLD (ASJ)

WAAS	APP CRS	Rwy Ldg	4501
CH 77837	188°	TDZE	67
W19A		Apt Elev	67

RNP APCH - GPS.

Circling Rwy 1 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 19 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using FKN altimeter setting. When local altimeter setting not received, use FKN altimeter setting and increase LPV DA to 434 feet; increase LNAV/VNAV DA to 515 feet and all visibilities ⅜ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct ILTOJ and hold, continue climb-in-hold to 3000.

AWOS-3	WASHINGTON CENTER	UNICOM
119.075	123.85 279.65	122.8 (CTAF) L

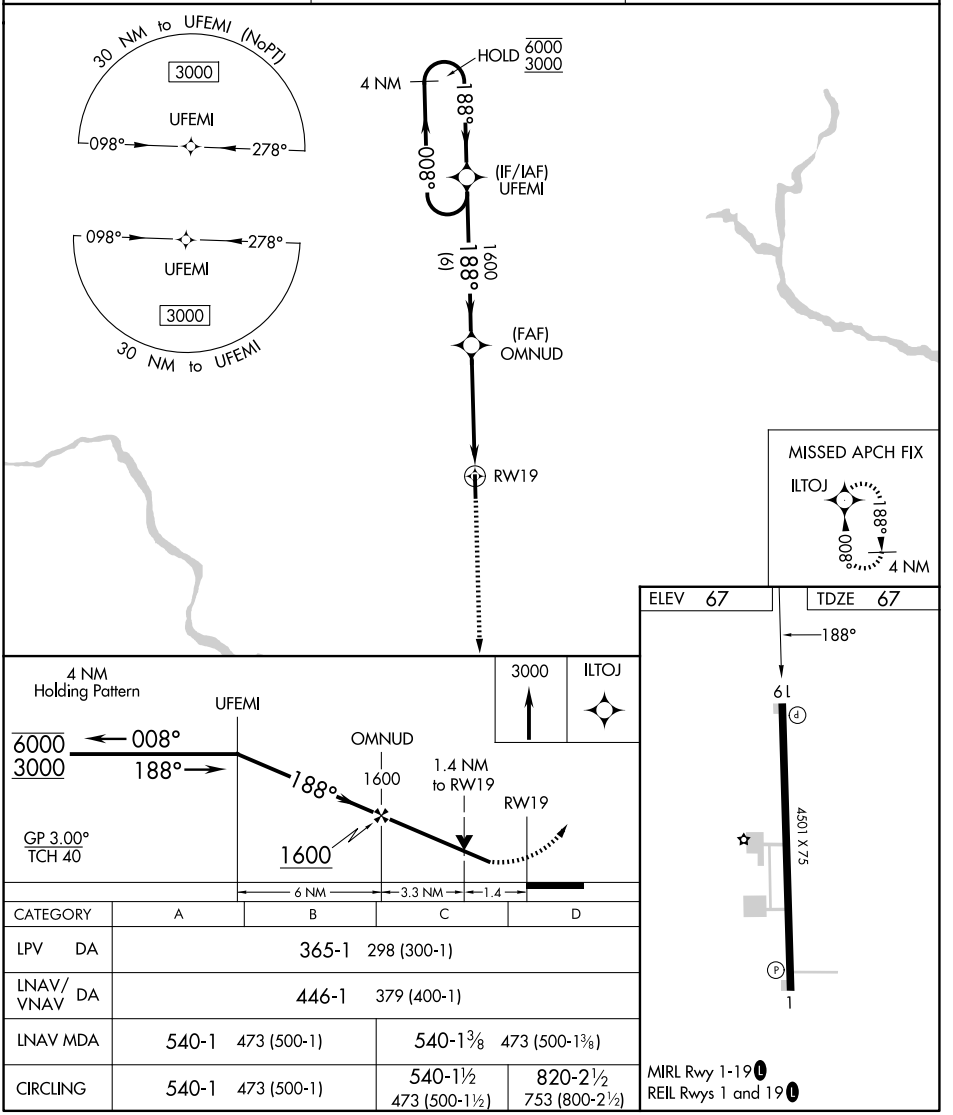

CATEGORY	A	B	C	D
LPV DA	365-1 298 (300-1)			
LNAV/VNAV DA	446-1 379 (400-1)			
LNAV MDA	540-1 473 (500-1)		540-1⅜ 473 (500-1⅜)	
CIRCLING	540-1 473 (500-1)		540-1½ 473 (500-1½)	820-2½ 753 (800-2½)

MIRL Rwy 1-19 L
REIL Rwys 1 and 19 L

SE-2, 06 AUG 2026 to 03 SEP 2026
SE-2, 06 AUG 2026 to 03 SEP 2026