

WAAS CH 82329 W04A	APP CRS 045°	Rwy Ldg 5010 TDZE 578 Apt Elev 578
--	------------------------	---


RNAV (GPS) RWY 4

FAIRFIELD COUNTY (FDW)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below
A -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2300 direct KICKY and hold.

AWOS-3 119.075	COLUMBIA APP CON 133.4 285.6	UNICOM 123.05 (CTAF) 0
--------------------------	--	----------------------------------

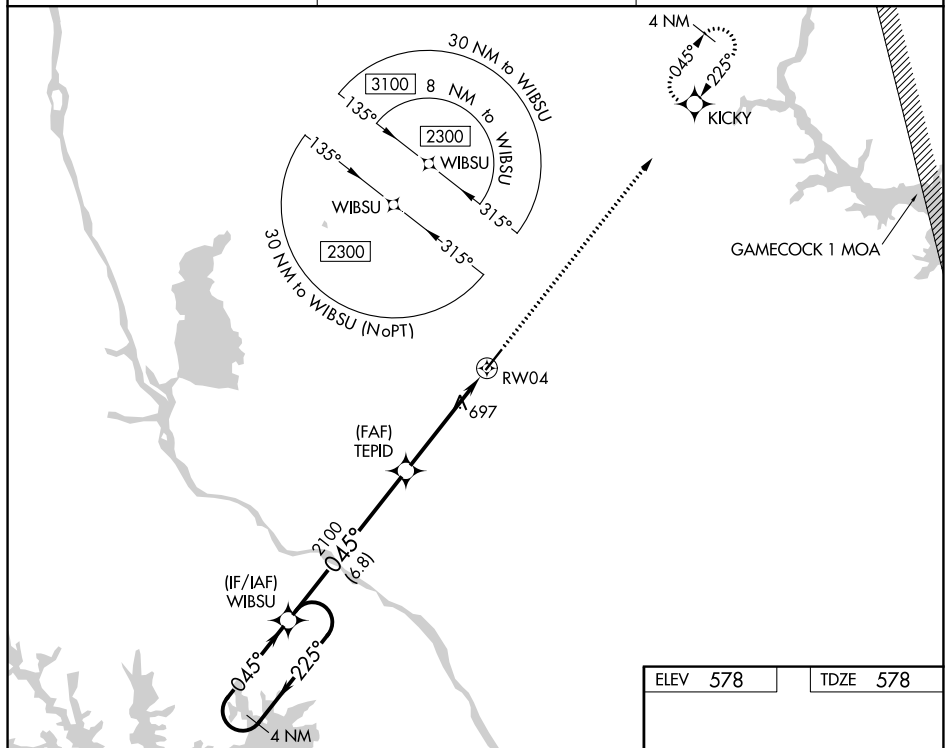

4 NM Holding Pattern

WBSU

2300 ← 225°
045° →

GP 3.00°
TCH 40°

VGS and RNAV glidepath not coincident
(VGS Angle 3.00°/TCH 32).

TEPID

2100

045°

2100

*1.1 NM to RW04

RW04

*RNAV only.

6.8 NM

3.6 NM

1.1

CATEGORY	A	B	C	D
LPV DA	828- $\frac{7}{8}$	250 (300- $\frac{7}{8}$)		
RNAV/ VNAV	828- $\frac{7}{8}$	250 (300- $\frac{7}{8}$)		
RNAV MDA	960-1	382 (400-1)	960-1 $\frac{1}{8}$	382 (400-1 $\frac{1}{8}$)
CIRCLING	980-1 402 (500-1)	1040-1 462 (500-1)	1080-1 $\frac{1}{2}$ 502 (600-1 $\frac{1}{2}$)	1360-2 $\frac{1}{2}$ 782 (800-2 $\frac{1}{2}$)