


WAAS CH 72807 W14A	APP CRS 147°	Rwy Idg TDZE 1142 Apt Elev 1145
--	------------------------	---


RNAV (GPS) RWY 14
NORTHWEST MISSOURI RGNL (EVU)

RNP APCH - GPS.	MISSED APPROACH: Climb to 6000 direct BARND and hold, continue climb-in-hold to 6000.
NA Circling NA east of Rwy 14-32. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use St. Joseph altimeter setting and increase LPV DA to 1517 feet, LNAV/VNAV DA to 1682 feet and all visibilities ½ SM. Increase all MDAs 140 feet, and LNAV visibility Cat C ¾ SM. Baro-VNAV and VDP NA when using St. Joseph altimeter setting.	

AWOS-3PT 118.225	MINNEAPOLIS CENTER 119.6 290.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

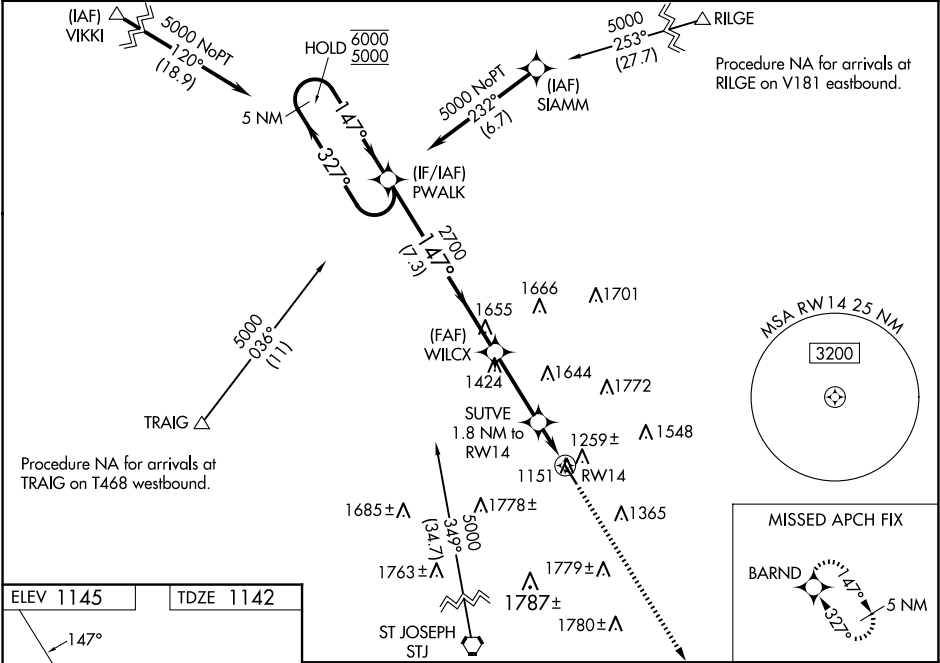

ELEV 1145	TDZE 1142
-----------	-----------

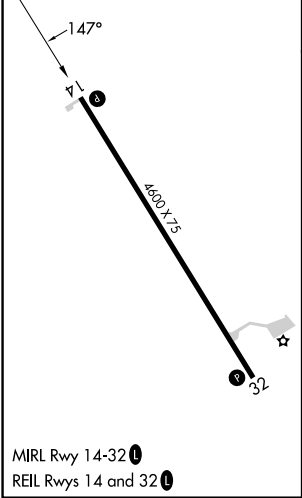

5 NM Holding Pattern PWALK				VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 34).	6000	BARND
6000 ← 327°				147° →		
GP 3.00°				TCH 40		
2700				2700		
SUTVE 1.8 NM to RW14				1760		
7.3 NM				3 NM		
				0.7		
				1.1		
CATEGORY	A	B	C	D		
LPV DA	1392-1 250 (300-1)			NA		
LNAV/VNAV DA	1557-1 415 (500-1)			NA		
LNAV MDA	1520-1 378 (400-1)			NA		
CIRCLING	1560-1 415 (500-1)	1600-1 455 (500-1)	2120-3 975 (1000-3)	NA		

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026