


WAAS CH 97532 W16A	APP CRS 164°	Rwy Ldg 4500 TDZE 1299 Apt Elev 1304
--	------------------------	---

RNAV (GPS) RWY 16
DODGE CENTER (TOB)


MISSED APPROACH: Climb to 3000 direct TUSZL and hold.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA with Rochester Intl altimeter setting. When local altimeter setting not received, use Rochester Intl altimeter setting and increase all DA 39 feet and all MDA 40 feet, and increase LNAV/VNAV all Cats, LNAV Cat C visibility $\frac{1}{8}$ mile, and Circling Cat C visibility $\frac{1}{4}$ mile.


AWOS-3PT 119,075	ROCHESTER APP CON ★ 119.8 251,125	CTAF 122.9 0
----------------------------	---	------------------------

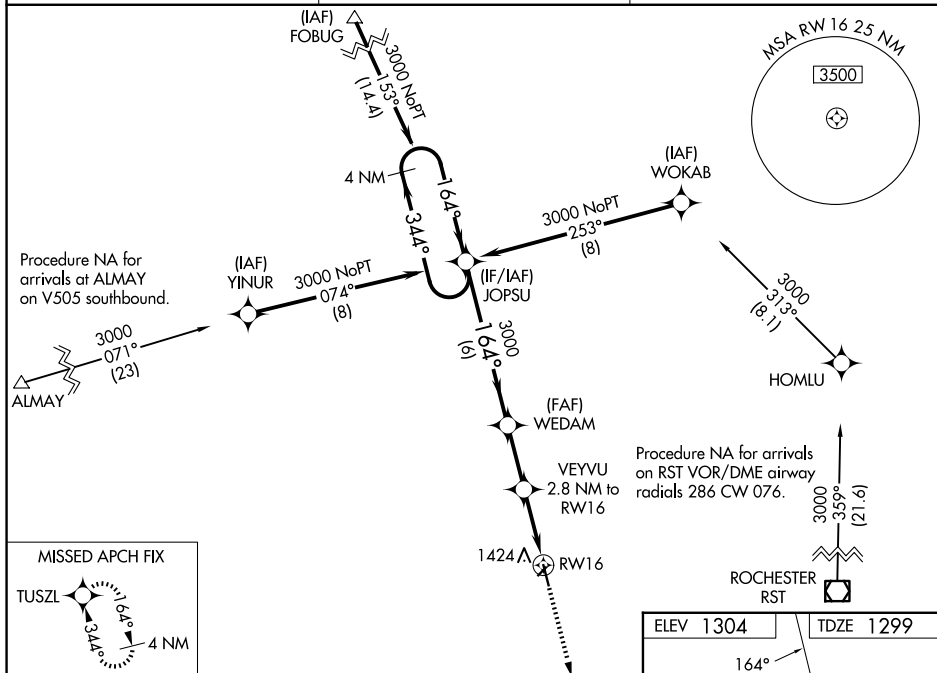

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 28).

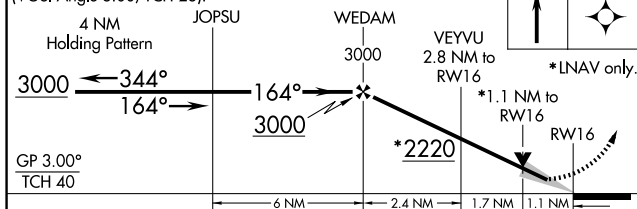

CATEGORY	A	B	C	D
LPV DA	1549-1	250 (300-1)		NA
LNAV/VNAV DA	1586-1	287 (300-1)		NA
LNAV MDA	1680-1	381 (400-1)	1680-1 $\frac{1}{8}$ 381 (400-1 $\frac{1}{8}$)	NA
CIRCLING	1960-1	656 (700-1)	1960-1 $\frac{3}{4}$ 656 (700-1 $\frac{3}{4}$)	NA

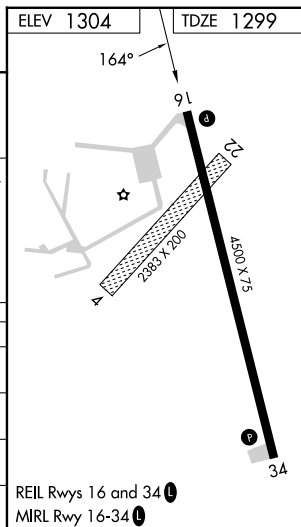

RNAV (GPS) RWY 16