


WAAS CH 77801 W21A	APP CRS 216°	Rwy Ldg TDZE 1222 Apt Elev 1222
--	------------------------	---

RNAV (GPS) RWY 21

BIG SANDY RGNL (SJS)

RNP APCH - GPS.		MISSED APPROACH: Climb to 4300 direct KAPLE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		
AWOS-3 120.175	HUNTINGTON APP CON 119.75 270.1	UNICOM 123.05 (CTAF) 0

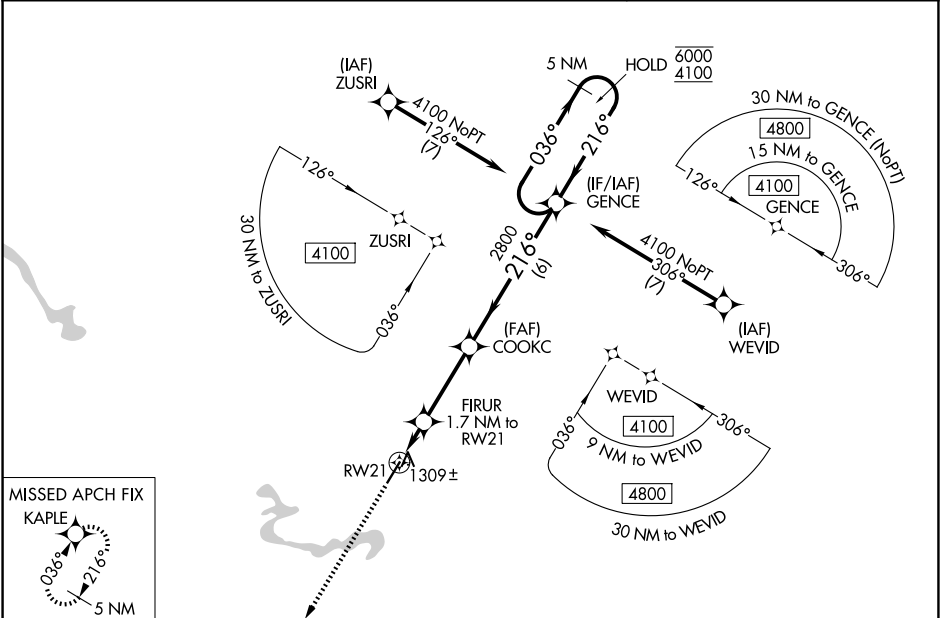

ELEV 1222

TDZE 1222

4300

KAPLE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

5 NM Holding Pattern

↑

✦

COOKC

2800

216°

2800

1800

1 NM to RW21

1.7 NM to RW21

1 NM

0.7 NM

3.1 NM

6 NM

GP 3.00° TCH 40

036° → 6000

← 216° 4100

CATEGORY	A	B	C	D
LPV DA	1472-¾		250 (300-¾)	
LNAV/VNAV DA	1520-⅞		298 (300-⅞)	
LNAV MDA	1560-1		338 (400-1)	
CIRCLING	1740-1	518 (600-1)	1920-2 698 (700-2)	2020-2½ 798 (800-2½)

REIL Rwy 3 and 21

MIRL Rwy 3-21