

TALLULAH, LOUISIANA

AL-9196 (FAA)

26022

WAAS Chan 99700 W36A	APP CRS 357°	Rwy Ldg 5002 TDZE 86 Apt Elev 86
--	------------------------	---

RNAV (GPS) RWY 36
VICKSBURG TALLULAH RGNL (TVR)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vicksburg Muni, MS altimeter setting and increase LPV DA to 309 feet, LNAV/VNAV DA to 516 feet all visibilities $\frac{1}{8}$ mile; increase all MDA 40 feet and visibility Cats C/D $\frac{1}{4}$ mile. Baro-VNAV and VDP NA with Vicksburg Muni, MS altimeter setting.




MISSED APPROACH:
Climb to 2000 direct
DEXIW and hold.

ASOS
118-525



MEMPHIS CENTER	
132.5	259.1

UNICOM
123.0 (CTAF) **L**

MISSED APCH FIX

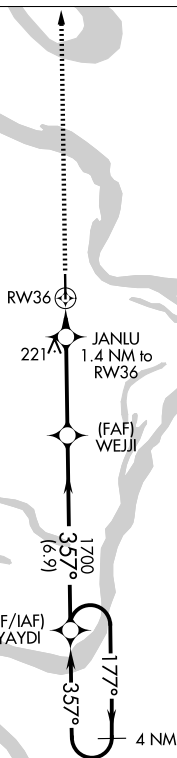

ELEV 86	D	TDZE 86
---------	----------	---------

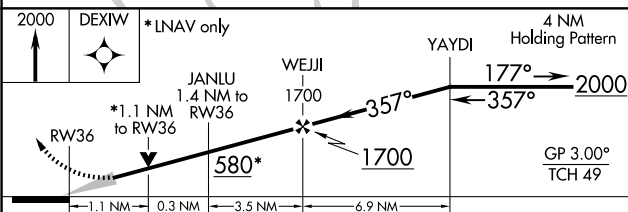

CATEGORY		A	B	C	D
LPV	DA	286-½		200 (200-½)	
LNAV/ VNAV	DA	493-⅞		407 (500-⅞)	
LNAV	MDA	480-½	394 (400-½)	480-⅝	394 (400-⅝)
CIRCLING		540-1	454 (500-1)	720-1¼ 634 (700-1¼)	720-2 634 (700-2)

TALLULAH, LOUISIANA

Amdt 4 15SEP16

VICKSBURG TALLULAH RGNL (TVR)

RNAV (GPS) RWY 36

32°21'N-91°02'W

SC-4, 06 AUG 2026 to 03 SEP 2026