

LOC/DME I-ERI 110.3 Chan 40	APP CRS 064°	Rwy Ldg 7501 TDZE 732 Apt Elev 732
---	------------------------	---

ILS or LOC RWY 6
ERIE INTL/TOM RIDGE FLD (ERI)

DME required. RADAR required for procedure entry. RNP APCH - GPS.


T Circling to Rwy 2, 20 NA at night. Circling NA southeast of Rwy 6-24.
A Autopilot coupled approach NA below 1580. For inop ALS, increase S-LOC 6 Cats C and D visibility to RVR 6000.

MALSR



MISSED APPROACH:
Climb to 3200 direct
JONLI and hold.

ATIS 120.35	BUFFALO APP CON★ 121.0 257.8	ERIE TOWER★ 118.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

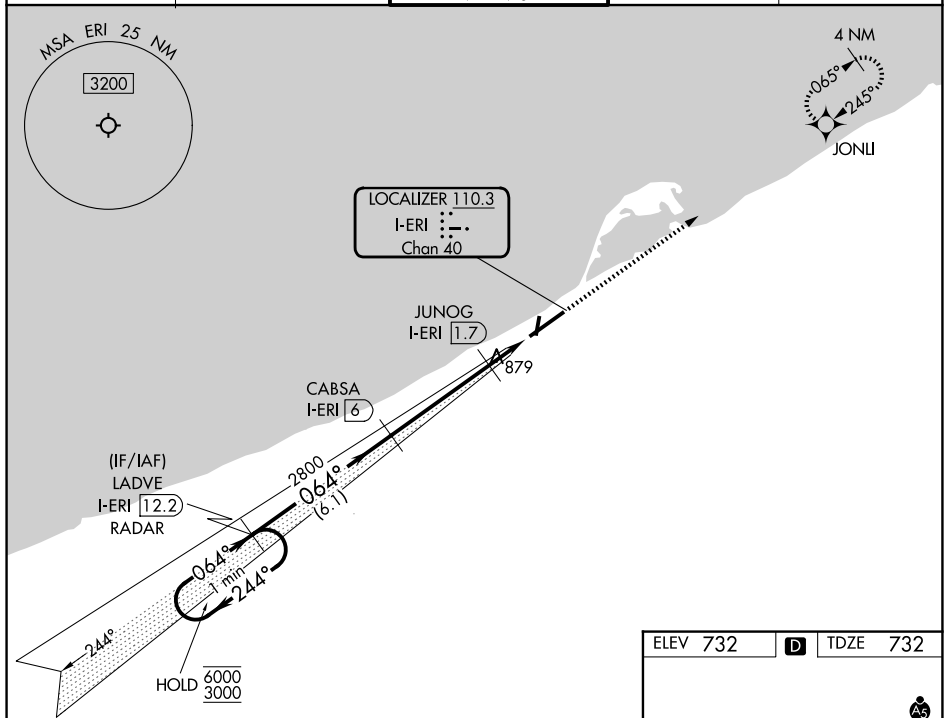

ELEV 732	D	TDZE 732
----------	----------	----------

Use I-ERI DME when on the localizer course.

One Minute Holding Pattern

LADVE I-ERI 12.2 RADAR

CABS A I-ERI 6

JUNOG I-ERI 1.7

I-ERI DME ANTENNA

I-ERI 0.8

I-ERI 0.3

6000 ← 244°

3000 ← 064°

2800

2800

1420

GS 3.00°


TCH 55

6.1 NM

4.3 NM

0.9 NM

1.1 NM

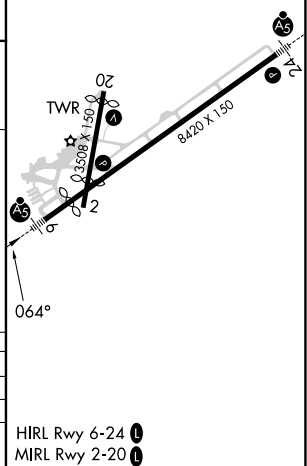

CATEGORY	A	B	C	D
S-ILS 6	982/24 250 (300-1/2)			
S-LOC 6	1140/24	408 (500-3/2)	1140/40	408 (500-3/4)
CIRCLING	1160-1 428 (500-1)	1200-1 468 (500-1)	1200-1 1/2 468 (500-1 1/2)	1340-2 608 (700-2)

HIRL Rwy 6-24 **L**
MIRL Rwy 2-20 **L**