

WRIGHTSTOWN, NEW JERSEY

ILS or LOC RWY 24

LOC I-JTQ 110.1	APCH CRS 238°	Rwy Idg 10,456	TDZE 117	Arpt Elev 141
--------------------	------------------	-------------------	-------------	------------------

(USAF)

MC GUIRE FIELD (JOINT BASE MC GUIRE DIX LAKEHURST) (KWRI)

V * When ALS inop, increase RVR to 40, vis to 3/4 mile. +RVR 18 authorized with use of FD or AP or HUD to DA.
** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/8 miles.
*** Circling NA SE of Rwy 24 and E of Rwy 36 when R-5001 A/B Active.

ALSF-1
MISSED APPROACH: Climb to 2000 via GXU R-236 to CISON and hold.

ATIS 110.6 270.1	MC GUIRE APP CON/DEP CON 126.475 363.8	TOWER 118.65 255.6	GND CON 121.8 275.8	PAR
---------------------	---	-----------------------	------------------------	-----

RADAR or DME required to identify the FAF.

RADAR required when R-5001 is active.

RADAR required for holding above 2000 and/or > 230 KIAS.

If RADAR inoperative, expect 15 min delay for deactivation of R-5001.

ROBBINSVILLE
113.8 RBV
Chan 85

MC GUIRE
110.6 GXU
Chan 43

LOCALIZER 110.1
I-JTQ

CISON
GXU 7.9


CUTIL
GXU 7.2
RADAR

ZUVAX
GXU 6


GXU 13.2

(IF/IAF)
DAYYO
GXU 9.2


When R-5001 is active with aerial gunnery, DAYYO hold-in-lieu of procedure turn NA, expect RADAR vectors.



EMERG SAFE ALT 100 NM 5100

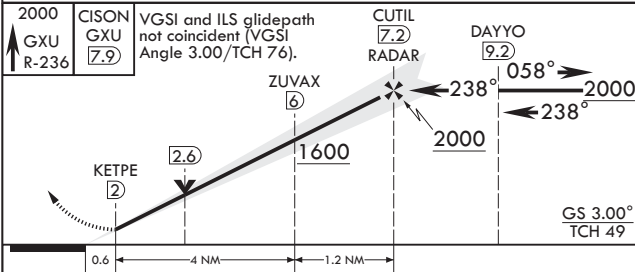

ELEV 141 See Supp for declared dist. TDZE 117



CATEGORY	A	B	C	D	E
S-ILS 24†	317/24		200	(200-½)	
S-LOC 24**	580/24	463 (500-½)	580/50	463	(500-1)
CIRCLING***	680-1	539 (600-1)	700-1½ 559 (600-1½)	700-2 1059 (600-2)	1200-3 1059 (1100-3)

FAF to MAP 5.2 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

WRIGHTSTOWN, NEW JERSEY

MC GUIRE FIELD (JOINT BASE MC GUIRE DIX LAKEHURST) (KWRI)

Amdt 6 18MAY23

40°01'N - 74°36'W

ILS or LOC RWY 24

NE-2, 03 SEP 2026 to 01 OCT 2026

NE-2, 03 SEP 2026 to 01 OCT 2026