WAAS	APP CRS	Rwy Ldg	6008
CH 69325	093°	TDZE	820
W09A		Apt Elev	826

RNAV (GPS) RWY 9

GOSHEN MUNI (GSH)

RNP APCH - GPS.

Circling NA to Rwys 5 and 23. Rwy 9 helicopter visibility reduction below ¾ SM NA. VDP NA when using ASW altimeter setting. When local altimeter setting not received, use ASW altimeter setting and increase all MDAs 40 feet; increase LP and LNAV visibility Cat C/D ⅛ SM and Circling visibility Cat D ¼ SM.

MISSED APPROACH: Climb to 1900 then climbing right turn to 2500 direct CPONE and hold.

ASOS	SOUTH BEND APP CON★	CLNC DEL	UNICOM
121.45	132.05 257.8	125.25	123.05 (CTAF) L

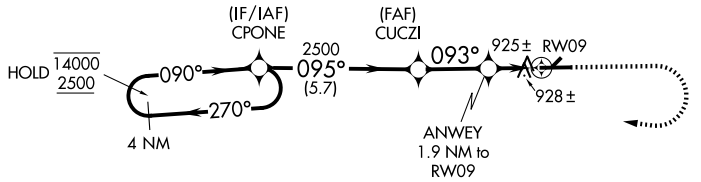



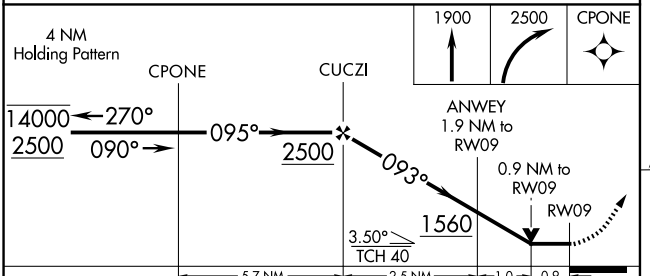



CATEGORY	A	B	C	D
LP MDA		1180-1	360 (400-1)	
LNAV MDA		1200-1	380 (400-1)	
CIRCLING	1300-1 474 (500-1)	1320-1 494 (500-1)	1500-2 674 (700-2)	1560-2¼ 734 (800-2¼)

HIRL Rwy 9-27 L
REIL Rwys 9 and 27 L

EC-2, 03 SEP 2026 to 01 OCT 2026
EC-2, 03 SEP 2026 to 01 OCT 2026