

APP CRS 271°	Rwy Ldg TDZE Apt Elev	9000 3852 3877
------------------------	-----------------------------	---

RNAV (RNP) Z RWY 27
HELENA RGNL (HLN)

RNP AR APCH - GPS.

V
A
❄-16°C

Inop table does not apply to RNP 0.30 DA. For uncompensated Baro-VNAV systems, procedure NA below -28°C or above 54°C. For inop ALS, increase RNP 0.13 DA* visibility all Cats to ½ SM, RNP 0.30 DA* visibility all Cats to 1 ½ SM.

MALSR


A5

MISSED APPROACH: Climb to 12000 on the RNAV missed approach route to PIXXI and hold, continue climb-in-hold to 12000.


*Missed approach requires minimum climb of 280 feet per NM to 7800.

#Missed approach requires minimum climb of 375 feet per NM to 6300.

ATIS 120.4	HELENA APP CON ★ 119.5 229.4	HELENA TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
---------------	---------------------------------	--	------------------	------------------

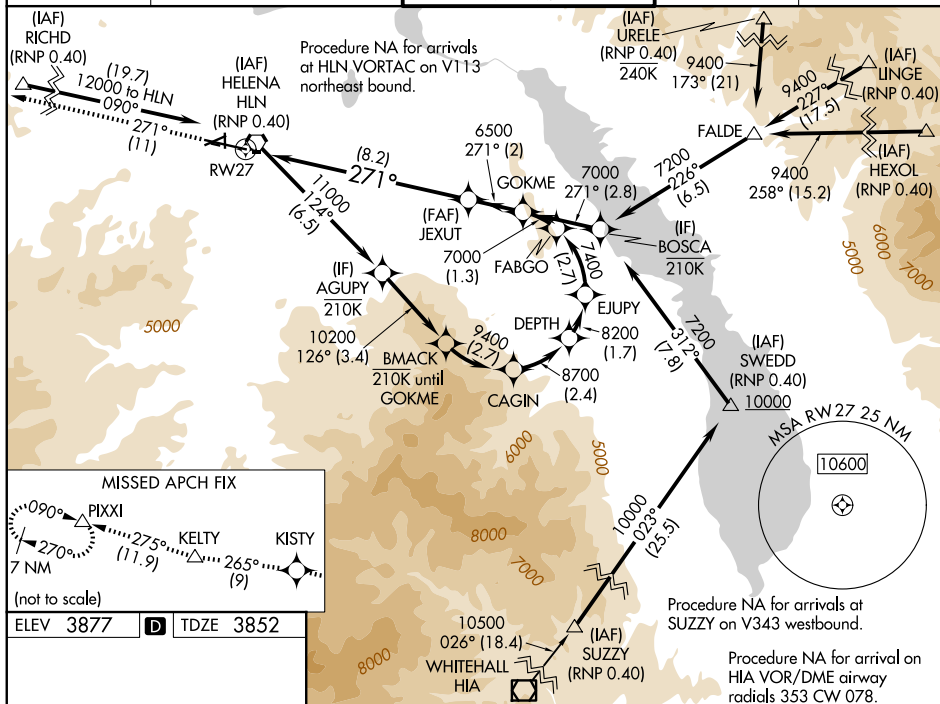

ELEV 3877	D	TDZE 3852
-----------	----------	-----------



12000 ↑ tr 271°	KISTY ✦ tr 265°	KELTY △ tr 275°	PIXXI △	JEXUT 6500	GOKME 7000
See planview for multiple IF locations.				271° 6500	
RW27				GP 3.00° TCH 55	
8.2 NM				2 NM	
CATEGORY	A	B	C	D	
RNP 0.13 DA*		4172-½	320 (300-½)		
RNP 0.20 DA#		4303-⅞	451 (500-⅞)		
RNP 0.30 DA#		4353-1	501 (500-1)		
RNP 0.30 DA		4866-4	1014 (1000-4)		

AUTHORIZATION REQUIRED