# RNAV (RNP) Y RWY 30L

## MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

| APP CRS | Rwy Ldg | 10000 |
|---|---|---|
| 301° | TDZE | 823 |
| | Apt Elev | 842 |

RNP AR APCH - GPS. Authorization required. From TONEE or BBUCK: RF.

For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 3000 direct WOXEB and hold.

| D-ATIS | MINNEAPOLIS APP CON | MINNEAPOLIS TOWER | GND CON |
|---|---|---|---|
| 135.35 239.275 | 118.725 335.65 (35)<br>119.3 335.65 (4-22, 12L-30R, 17)<br>126.95 335.65 (12R-30L) | 123.675 273.55 (17-35)<br>123.95 273.55 (12L-30R)<br>126.7 273.55 (4-22, 12R-30L) | 121.8 348.6 (N)<br>121.9 348.6 (S)<br>127.925 348.6 (W) |

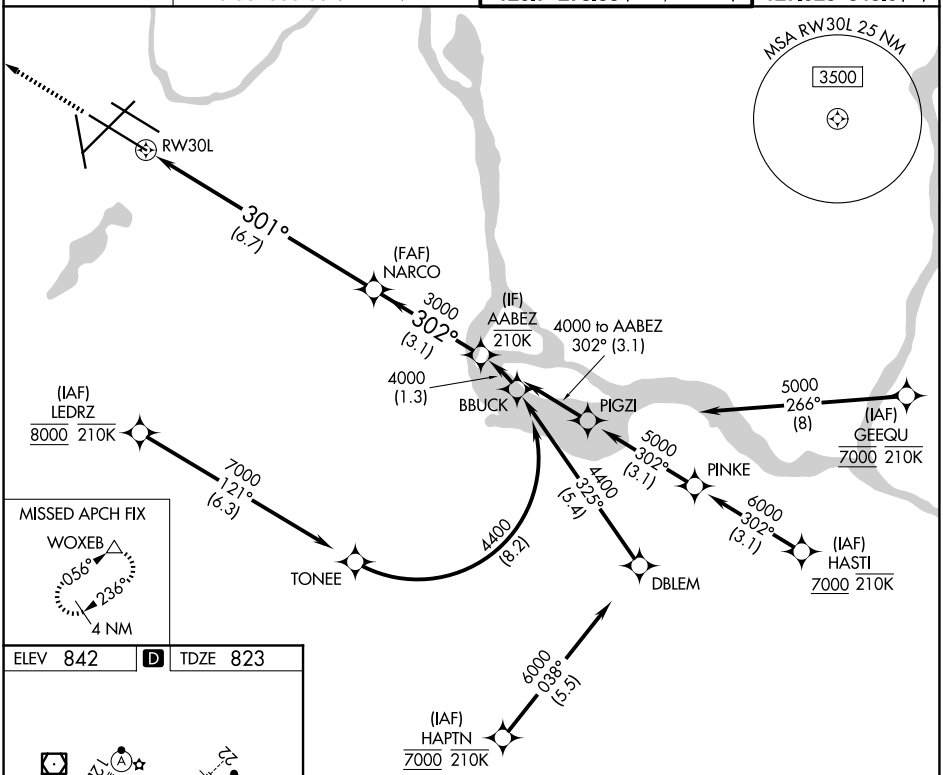


ELEV 842 | D | TDZE 823




HIRL all rwys
REIL Rwy 17
TDZL/RCLS Rwys 12L, 12R, 30L, and 35

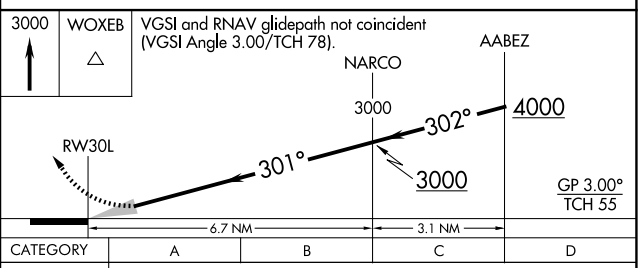


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.30 DA | 1150/26 327 (400-½) | | | |

## AUTHORIZATION REQUIRED



NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026