WAAS	APP CRS	Rwy Ldg	8002
CH 93506	061°	TDZE	3952
W05A		Apt Elev	3967

RNAV (GPS) RWY 5

SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BFF)

RNP APCH.

Baro-VNAV NA when using Alliance altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 51°C (124°F). When local altimeter setting not received, use Alliance altimeter setting and increase all DA 91 feet and all MDA 100 feet; increase LPV all Cats visibility ⅜ mile, LNAV/VNAV all Cats visibility ¼ mile, LNAV Cats C/D visibility ¼ mile, Circling Cat C visibility ½ mile and Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 4400 then climbing right turn to 6900 direct BFF VORTAC and hold, continue climb-in-hold to 6900.

ASOS	DENVER CENTER	UNICOM
121.025	127.95 338.2	123.0 (CTAF) L

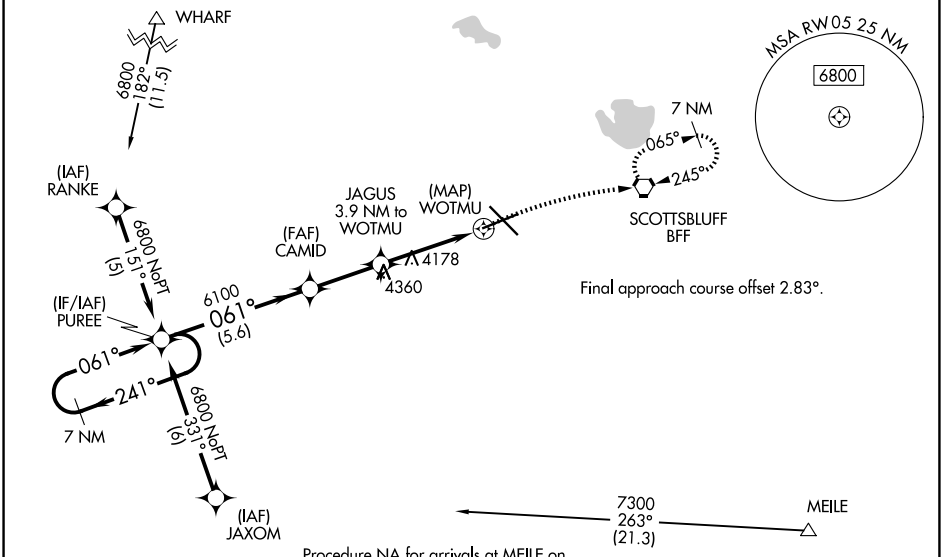

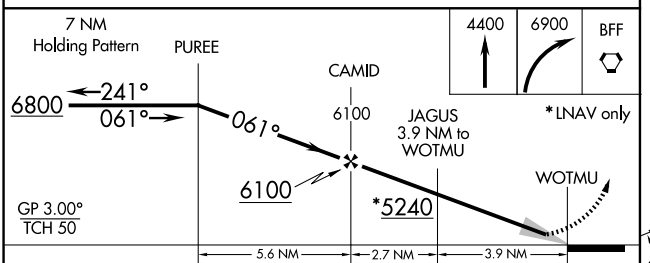

CATEGORY	A	B	C	D
LPV DA	4202-1	250 (300-1)		
LNAV/VNAV DA	4418-1⅝	466 (500-1⅝)		
LNAV MDA	4480-1	528 (600-1)	4480-1½	528 (600-1½)
CIRCLING	4500-1	533 (600-1)	4560-1½ (593 (600-1½))	4720-2½ (753 (800-2½))

ELEV 3967 D TDZE 3952



HIRL Rwy 12-30 L
MIRL Rwy 5-23 L

NC-2, 03 SEP 2026 to 01 OCT 2026
NC-2, 03 SEP 2026 to 01 OCT 2026