


LOC I-SBN	APP CRS	Rwy Ldg
109.3	274°	8412
		TDZE
		774
		Apt Elev
		798

ILS or LOC RWY 27L
SOUTH BEND INTL (SBN)

RNP APCH - GPS. From NORNA.	MALSR	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct MISHA LOM/RADAR and hold, continue climb-in-hold to 3000.
ADF required.		
▼ Circling Rwy 27R NA at night.		
▲ * RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 120.675	SOUTH BEND APP CON★ 118.55 257.8	SOUTH BEND TOWER★ 135.675 (CTAF) 0 257.8	GND CON 121.7
------------------------	--	--	-------------------------

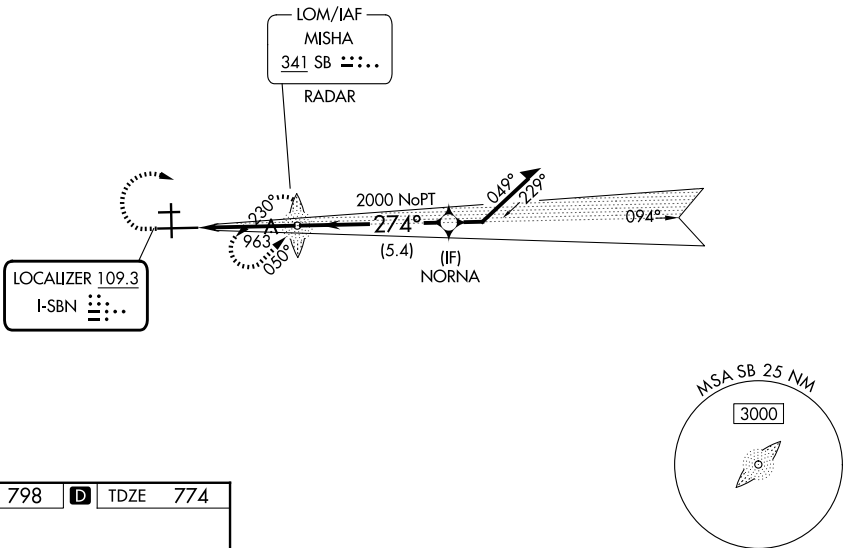

ELEV	798	D	TDZE	774
------	-----	---	------	-----

HIRL Rwy 9R-27L

MIRL Rwy 18-36

MIRL Rwy 9L-27R

FAF to MAP 3.6 NM					
Knots	60	90	120	150	180
Min:Sec	3:36	2:24	1:48	1:26	1:12

1500	3000	SB	SB LOM MISHA RADAR	Remain within 10 NM
				GS 3.00° TCH 53
CATEGORY				
A				
B				
C				
D				
S-ILS 27L *				
974/24 200 (200-½)				
S-LOC 27L				
1220/24 446 (500-½)				
1220/45 446 (500-¾)				
CIRCLING				
1280-1 482 (500-1)				
1440-1¾ 642 (700-1¾)				
1520-2¼ 722 (800-2¼)				