



LOC/DME I-ALI	APP CRS	Rwy Idg	5997
109.3	308°	TDZE	174
Chan 30		Apt Elev	178

LOC/DME RWY 31

ALICE INTL (ALI)

RADAR required for procedure entry from Corpus Christi CRP VORTAC.		MALS	MISSED APPROACH: Climb to 1500 then climbing left turn to 2000 on direct ALI VOR and hold.
VDP NA when using Nueces County altimeter setting. When local altimeter setting not received, use Nueces County altimeter setting and increase all MDAs 60 feet and S-LOC 31 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. For inop ALS when using Nueces County altimeter setting, increase S-31 Cats C, D visibility to 1½ SM.			

ASOS	KINGSVILLE APP CON ★	UNICOM
119.225	119.9 290.45	123.0 (CTAF) 0

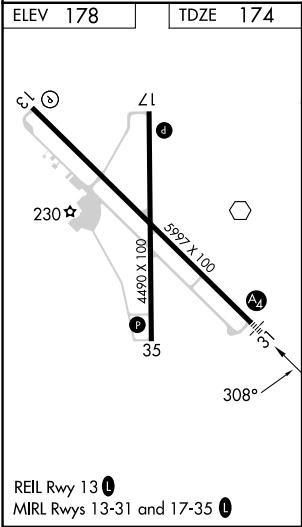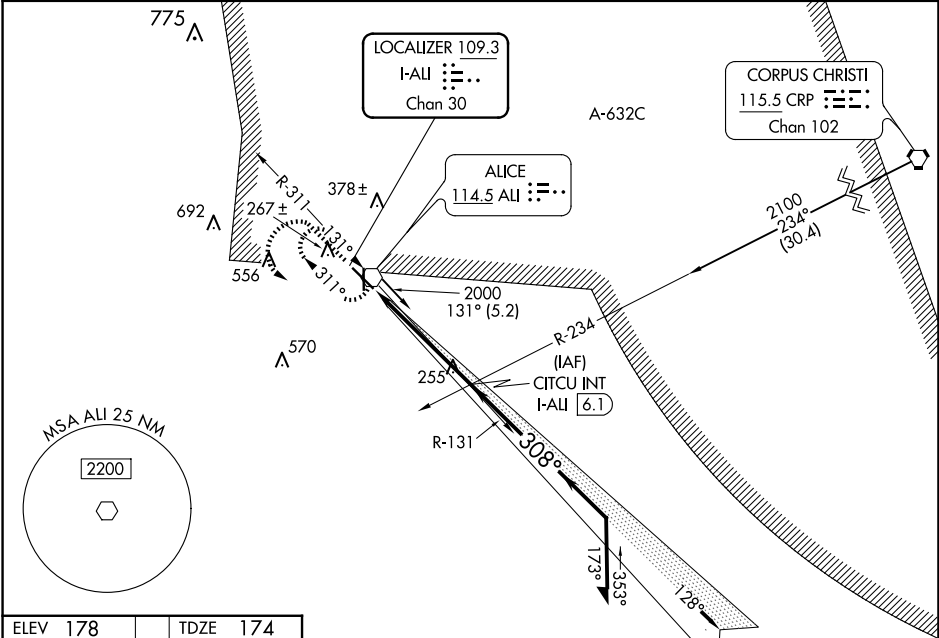

1500		2000		ALI		CITCU INT		I-ALI 6.1		2000	
↑		↙		⬡							
VGSI and descent angles not coincident.											
						I-ALI 2.1		128°		Remain within 10 NM	
						I-ALI 1.2		308°		2000	
						3.04°		1800			
						TCH 47					
						1 NM		3.9 NM			
CATEGORY		A		B		C		D			
S-31		520-¾ 346 (400-¾)									
CIRCLING		600-1 422 (500-1)		640-1 462 (500-1)		700-1½ 522 (600-1½)		900-2¼ 722 (800-2¼)			