

WAAS CH 42629 W13A	APP CRS 128°	Rwy ldg TDZE Apt Elev	5997 178 178
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

ALICE INTL (ALI)

RNP APCH.


▼

▲

Baro-VNAV NA when using Nueces County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 42°C. When local altimeter setting not received, use Nueces County altimeter setting and increase all DA 56 feet and all MDA 60 feet, increase LPV and LNAV/VNAV visibility all Cats ¼ mile and LNAV Cat C and D ½ mile. Rwy 13 helicopter visibility reduction below ¾ SM NA. VDP NA with Nueces County altimeter setting.

MISSED APPROACH: Climb to 2600 direct ITDAZ and hold.

ASOS 119.225	KINGSVILLE APP CON ★ 119.9 290.45	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

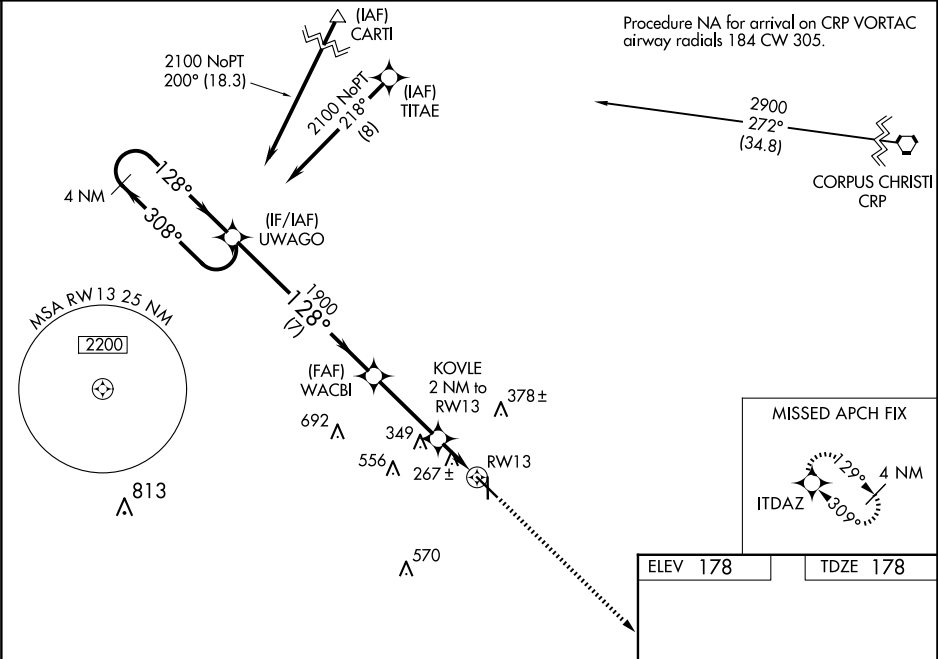

4 NM Holding Pattern

UWAGO

2100

308°

128°

GP 3.00° TCH 50

1900

128°

WACBI 1900

KOVLE 2 NM to RWY 13

*1 NM to RWY 13

RWY 13

*860

7 NM

3.3 NM

1 NM

1 NM

2600

ITDAZ

*LNAV only.

ELEV 178

TDZE 178

128°

230

5997 X 100

35

REIL Rwy 13 0

MIRL Rwy 13-31 and 17-35 0

CATEGORY	A	B	C	D
LPV DA		428-¾	250 (300-¾)	
LNAV/VNAV DA		428-¾	250 (300-¾)	
LNAV MDA	560-1	382 (400-1)	560-1½	382 (400-1½)