

LOC/DME I-HTS <u>109.9</u> Chan 36	APP CRS 118°	Rwy Ldg 6516 TDZE 828 Apt Elev 828
--	------------------------	---

ILS or LOC RWY 12

TRI-STATE/MILTON J FERGUSON FLD (HTS)

DME required. RADAR required for procedure entry.


MALSR




MISSED APPROACH: Climb to 2800 then climbing left turn to 4000 on heading 005° and HVQ VOR/DME R-284 to MILLK/HVQ VOR/DME 34 DME and hold, continue to climb-in-hold to 4000.

T For inop ALS, increase S-LOC 12 Cats C and D visibility
A to RVR 5500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

ATIS 125.2	HUNTINGTON APP CON 119.75 270.1	HUNTINGTON TOWER 118.5 270.1	GND CON 121.9
---------------	------------------------------------	---------------------------------	------------------

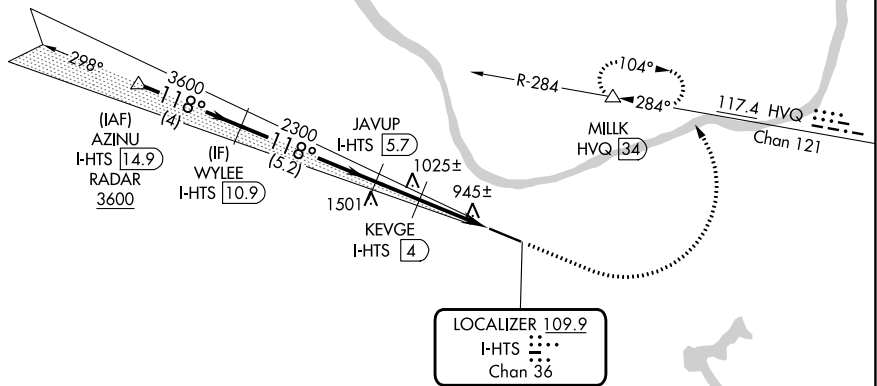

CAUTION: Fuel burning stacks 2 miles west of Rwy 12 may be mistaken for MALSR.



CATEGORY	A	B	C	D
S-ILS 12 *	1028/24		200 (200-½)	
S-LOC 12	1200/24	372 (400-½)	1200/35	372 (400-¾)
CIRCLING	1300-1 472 (500-1)	1380-1 552 (600-1)	1520-2 692 (700-2)	1740-3 912 (1000-2)