VORTAC LFT	APP CRS	Rwy Ldg	5403
109.8	137°	TDZE	42
Chan 35		Apt Elev	42

VOR/DME RWY 11

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

Procedure NA at night. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all MDAs 40 feet, increase Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2100 to LFT VORTAC and on LFT VORTAC R-092 to LULEW/LFT 16 DME.

ATIS	LAFAYETTE APP CON ★	LAFAYETTE TOWER ★	GND CON	UNICOM
134.05	121.1 363.0	118.5 (CTAF) L 257.8	121.8	122.95

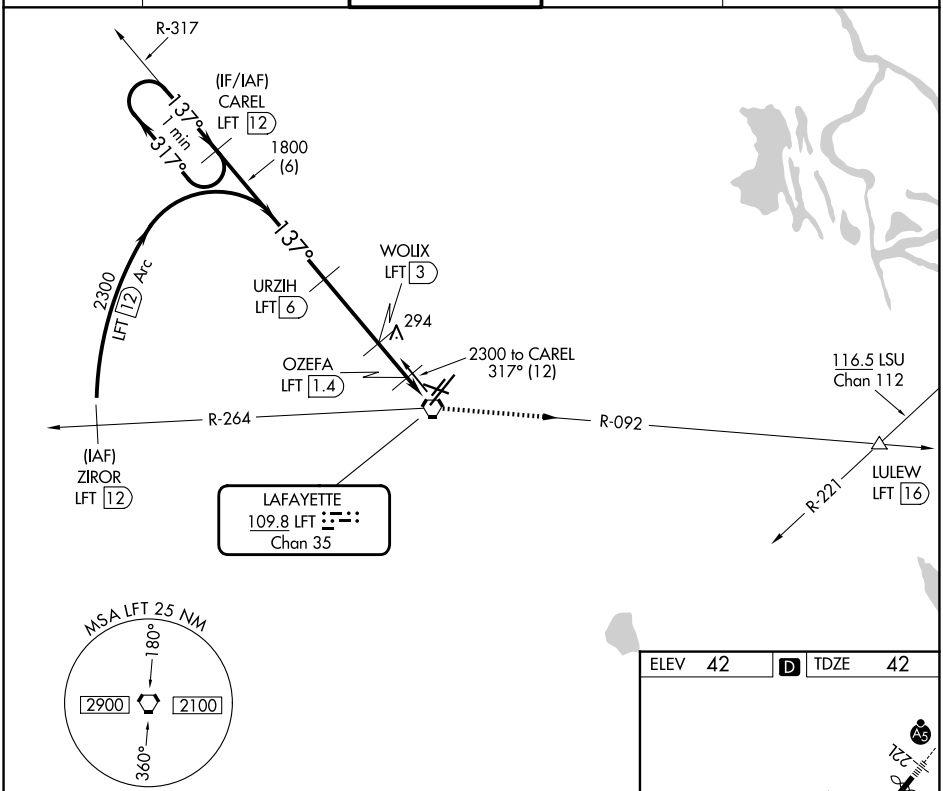

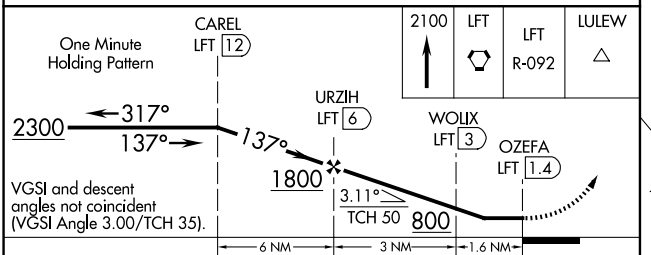

CATEGORY	A	B	C	D
S-11	660-1	618 (700-1)	660-1¾ 618 (700-1¾)	660-2 618 (700-2)
CIRCLING	660-1	618 (700-1)	700-1¾ 658 (700-1¾)	700-2 658 (700-2)

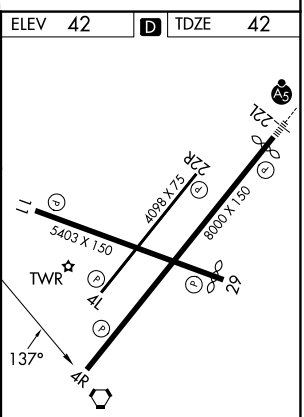

REIL Rwys 4L, 4R, 11, 22R and 29
MIRL Rwy 11-29 and 4L-22R
HIRL Rwys 4R-22L

SC-4, 03 SEP 2026 to 01 OCT 2026
SC-4, 03 SEP 2026 to 01 OCT 2026